

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Seward County, Sec. 22 Twp. 33 Rge. 33 (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE SE

Lease Owner Anadarko Production Company

Lease Name Jarrett "A" Well No. 1

Office Address P. O. Box 351, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed April 2 1963

Application for plugging filed April 2 1963

Application for plugging approved April 2 1963


Plugging commenced April 2 1963

Plugging completed April 2 1963

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

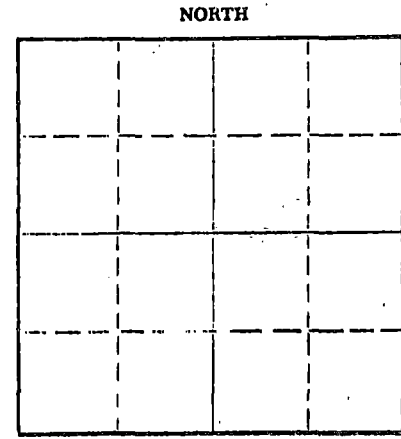

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott

Producing formation Depth to top Bottom Total Depth of Well 6232 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|---------|--------|------------|
| | | | | 8 5/8" | 1577' | None |
| | | | | 13 3/8" | 62' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 90 sacks cement at 2870'
Spotted 45 sacks cement at 720'
Spotted 15 sacks cement at 45' to 5'

RECEIVED
STATE CORPORATION COMMISSION

APR 4 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Roberts Drilling Company

Address P. O. Box 633, Russell, Kansas

STATE OF KANSAS, COUNTY OF SEWARD, ss.

R. L. O'Shields (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. O'Shields
R. L. O'Shields, Vice President
P. O. Box 351, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of April, 1963

Donald L. Vangerson
Notary Public.

My commission expires

MY COMMISSION EXPIRES SEPT. 29, 1964

INVOICED

DATE 4/5/63

INV. NO. 6842-W

DRILLER'S LOG

WELL NAME Jarrett "A" COMPANY OPERATING Anadarko Production Company
 ADDRESS of COMPANY Box 351, Liberal, Kansas

WELL LOCATION C 1/4 NE 1/4 SE 1/4,
1980 ft. North of South line,
1980 ft. East of West line; Sec. 22 Twp. 33 Rge. 33, Seward County, Kansas

DRILLING STARTED March 12, 1963 DRILLING COMPLETED April 2, 1963
 WELL COMPLETED April 2, 1963 WELL CONNECTED _____, 19____

ELEVATION 2824.5 ft. Ground Level CHARACTER OF WELL (Oil, Gas, or Dry Hole) Dry Hole

| OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION | | | | | |
|---|------|----|--------------|--------------|-----------|
| Name | From | To | No. of Shots | Gallons Used | Kind Used |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

RECEIVED
 STATE CORPORATION COMMISSION
 APR 4 1963
 CONSERVATION DIVISION
 Wichita, Kansas

CASING RECORD

| Size | Amount Set | Sacks of Cement | Amount Pulled |
|---------|------------|-----------------|---------------|
| 8 5/8" | 1577' | 800 | None |
| 13 3/8" | 62' | 100 | None |
| | | | |
| | | | |

FORMATION RECORD

| Formation | Top | Bottom | Formation | Top | Bottom |
|---------------------|------|--------|--------------|------|--------|
| Surface Sand | 0 | 60 | Lime & Chalk | 3210 | 3684 |
| Sand & Shells | 60 | 371 | Lime & Shale | 3684 | 3817 |
| Sand & Shale | 371 | 464 | Lime | 3817 | 4058 |
| Red Bed & Sand | 464 | 880 | Lime & Shale | 4058 | 4416 |
| Gypsum & Sand | 880 | 970 | Lime | 4416 | 5398 |
| Red Bed & Sand | 970 | 1290 | Lime & Shale | 5398 | 5780 |
| Red Bed | 1290 | 1350 | Lime | 5780 | 6232 |
| Red Bed & Anhydrite | 1350 | 1570 | Total Depth | 6232 | |
| Anhydrite | 1570 | 1640 | | | |
| Red Bed & Shale | 1640 | 2060 | | | |
| Lime & Shale | 2060 | 3084 | | | |
| Lime | 3084 | 3210 | | | |

RESULTS of INITIAL PRODUCTION TEST: _____

15-175-10008-0000

ANADARKO PRODUCTION CO.
Jerrett "A" #1

C. NE SE Sec. 22-33-33W
Seward County, Kansas

R.T.D. 6232'

CONTRACTOR: Roberts Drilling Co.

Commenced 3/12/63
Completed 4/2/63

Set 13 3/8" @ 61.65' w/100 sx cmt.
Set 8 5/8" @ 1577' w/800 sx cmt.

| | |
|------------------------|------|
| Surface Sand & Clay | 132 |
| Sand & Shale | 464 |
| Sand & Red Bed | 880 |
| Gyp. & Sand | 970 |
| Sand & Red Bed | 1290 |
| Red Bed | 1350 |
| Red Bed & Anhydrite | 1570 |
| Anhydrite | 1600 |
| Sandy Shale | 1640 |
| Red Bed & Shale | 2060 |
| Lime & Shale | 3084 |
| Lime | 3210 |
| Lime & Chalk Stringers | 3370 |
| Lime & Chalk | 3694 |
| Lime & Shale | 3817 |
| Lime | 4058 |
| Shale & Lime | 4416 |
| Lime | 5398 |
| Lime & Shale | 5780 |
| Lime, Shale & Sand | 5838 |
| Lime | 6232 |

RECEIVED
STATE CORPORATION COMMISSION
APR 8 1963
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
RUSSELL COUNTY) SS:

I hereby certify that the above information is correct to the best of my knowledge.

ROBERTS DRILLING CO.
By Mildred B. Belkney
Clara Hummel
Notary Public

Subscribed and sworn to before me this 5th day of April, 1963.

My Commission Expires 6/17/66