


15-175-01002-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

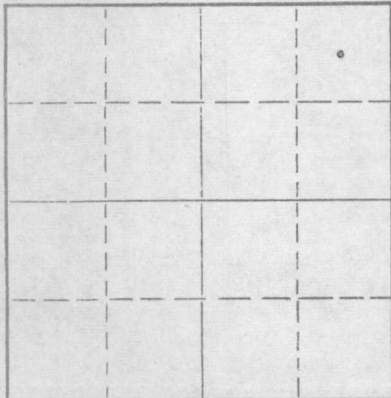

Locate well correctly on above
Section Plat

Seward County. Sec. 32 Twp. 33S Rge. (E) 33 (W)

Location as "NE/CNW/SW" or footage from lines C NE/4 NE/4

Lease Owner Cities Service Petroleum Company

Lease Name Smith "T" Well No. 1

Office Address Box 1147, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed December 14 1961

Application for plugging filed December 14 1961

Application for plugging approved December 14 1961

Plugging commenced December 14 1961

Plugging completed December 15 1961

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes Verbal

Name of Conservation Agent who supervised plugging of this well Mr. Bill Lac Kamp

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Marmaton</u>	<u>Salt Water</u>	<u>5108</u>	<u>5143</u>	<u>8-5/8</u>	<u>1602</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- Spotted 30 sx. common cement thru drill pipe 5180'-5075'
- Heavy Mud 5075'-2750'
- Spotted 70 sx. common cement thru drill pipe 2750'-2505'
- Heavy Mud 2505'-1600'
- Spotted 20 sx. common cement thru drill pipe 1600'-1530'
- Heavy Mud 1530'- 650'
- Spotted 20 sx. common cement thru drill pipe 650'- 580'
- Heavy Mud 580'- 35'
- Spotted 10 sx. common cement thru drill pipe 35'-surface

RECEIVED
STATE CORPORATION COMMISSION
DEC 27 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oil Well Cementing Company

Address Hays, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.

I, W. J. Devaney (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Devaney W. J. Devaney
Box 1147, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December, 19 61

My commission expires 3-31-65

James F. Kyger James F. Kyger
Notary Public.

