


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Seward County. Sec. 23 Twp. 33S Rge. 31 (E) (W) X
Location as "NE/CNW&SW&" or footage from lines SE SE
Lease Owner A. L. Abercrombie, Inc.
Lease Name Wheatley "A" Well No. 1
Office Address 80 1/2 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed Nov. 1 19 73
Application for plugging approved Nov. 2 19 73
Plugging commenced 2-20 19 74
Plugging completed 2-22 19 74
Reason for abandonment of well or producing formation _____

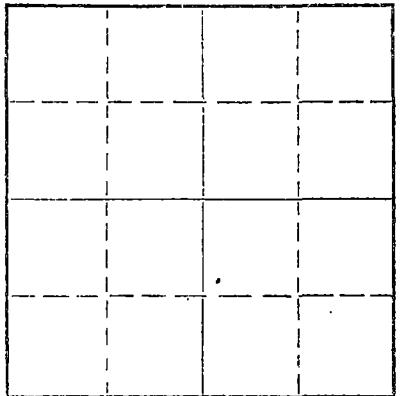

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ed Eves
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5890 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1263	none
				4 1/2	5889	2136

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump 30 sks. of cement @ 5583
Pump 35 sks. of cement @ 800 to 700
Put 15 sks. of cement @ 45 to 0

RECEIVED
STATE CORPORATION COMMISSION
MAR 19 1974
CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE CORPORATION COMMISSION
MAR 5 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargents Casing Pulling Service Kansas No. 511
Address Box 506 Liberal, Kansas 67901

STATE OF Kansas, COUNTY OF Sedgwick, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
801 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of March, 19 74

My commission expires 2-10-74
[Signature] Notary Public.

Wheatley #1 - "A"
 Panhandle Development Company, Inc.
 Section 23-33-31
 Seward County, Kansas

CASING RECORD:

Ran 41 joints 3 5/8" O.D. 24 1/2 casing, set a 1258.41 G.L., cemented w/600 sacks Sunset cement. Ran 65 joints. 192.95' of 9.5" & 179 joints, 5743.79' of used 4 1/2" casing set at 5879' F.B., cemented w/200 sacks lime-water & #5 flow seal, 50 sacks common, 25 gel and #7 flow seal.

Commenced: 3-04-62
 Completed: 3-25-62

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 2 1973
 CONSERVATION DIVISION
 Wichita, Kansas

FORMATION

	FROM	TO	
Surface Soil and Clay	0	125	
Sand and Shale	125	560	
Red Bed and Shale	560	1265	
Red Bed and Anhydrite	1265	1575	
Red Bed and Shale	1575	2040	
Shale and Lime	2040	2608	
Lime	2608	2845	
Lime and Shale	2845	2920	
Lime	2920	3530	
Lime and Shale	3530	3645	
Lime	3645	3798	
Lime and Shale	3798	3870	
Lime	3870	3969	
Lime and Shale	3969	4318	
Lime	4318	4887	
Lime and Shale	4887	4967	
Lime	4967	5890	RFD

STATE OF KANSAS)
) SS
 COUNTY OF SEWARD)

I hereby affirm that the above and foregoing is a true and correct copy of the log of the Wheatley #1-"A" well, located SE-SE of Section 23-33-31, Seward County, Kansas.

McCLELLAN DRILLING COMPANY

[Signature]
 J. J. McClellan, Manager

Subscribed and sworn to before me a notary public this 27th day of March, 1962.

[Signature]
 Sharon E. Halbrook, Notary Public

My Commission Expires:

[Signature]