

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Seward County, Sec. 21 Twp. 33S Rge. 34W (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE SW

Lease Owner Anadarko Production Company

Lessee Name Morlan "A" Well No. 2

Office Address Box 351, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed May 18 19 65

Application for plugging filed May 20 19 65

Application for plugging approved May 25 19 65


Plugging commenced May 27 19 65

Plugging completed May 27 19 65

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19 -

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

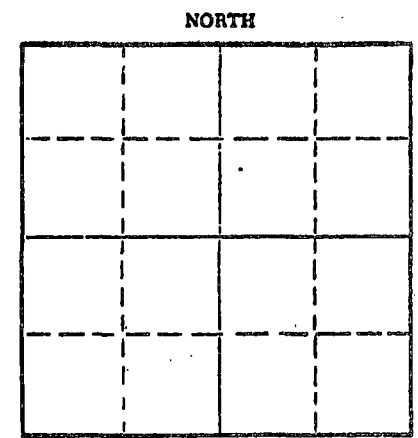

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation None Depth to top Bottom Total Depth of Well 6303 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Toronto	Gas	4231	4235	8-5/8"	1652	None
				4-1/2"	4360	2910'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 20 sacks cement to 3850'. Shot off casing @ 2910' and pulled to 700', filled w/mud from 2910-700'. Pumped in 35 sacks cement at 700', laid down casing and spotted 15 sacks from 45' to surface. Cement plugs were spotted with heavy mud.

RECEIVED
STATE CORPORATION COMMISSION
JUN 11 1965
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service

Address 1546 Clay Court, Liberal, Kansas

STATE OF KANSAS, COUNTY OF SEWARD ss.
V. K. Downey, Supt. Drilling and Production (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. K. Downey, Supt. Drilling and Production
Box 351, Liberal, Kansas

SUBSCRIBED AND SWORN TO before me this 8th day of June, 19 65

Ronald L. Vangerson
Notary Public.

My commission expires My Commission Expires Sept. 29, 1968

DRILLER'S LOG

WELL NAME: Morlan "A" No. 2 ; COMPANY OPERATING: Anadarko Production Company
 ADDRESS of COMPANY: Box 351, Liberal, Kansas
 WELL LOCATION: 1/4 NE 1/4 SW 1/4,
1980 ft. North of South line,
1980 ft. East of West line; Sec. 21, Twp. 33S, Rge. 34W, Seward County, Kansas
 DRILLING STARTED April 15, 1965; DRILLING COMPLETED April 30, 1965
 WELL COMPLETED May 18, 1965; WELL CONNECTED _____, 19____
 ELEVATION: 2896 ft. Ground Level; CHARACTER OF WELL (Oil, Gas, or Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION					
Name	From	To	No. of Shots	Gallons Used	Kind Used
Toronto	4231'	4235'	16	500	15%

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 11 1965
 CONSERVATION DIVISION
 Wichita, Kansas

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8-5/8"	1652'	1000	None
4-1/2"	4360'	185	2910'

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Top Soil	0	100			
Sand & Red Bed	100	870			
Sand, Red Bed & Anhydrite	870	2240			
Anhydrite & Shale	2240	2720			
Lime & Shale	2720	3160			
Lime, Shale & Chalk	3160	3816			
Shale & Lime	3816	5145			
Lime & Shale	5145	6215			
Lime	6215	6303			
Total Depth	6303				

RESULTS of INITIAL PRODUCTION TEST: May 18, 1965: 4-Hour Blowdown gas gauged 186 MCFD
with 3 barrels water per hour.