


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

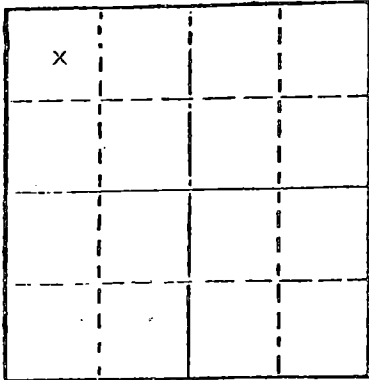

Locate well correctly on above
Section Plat

Meade County, Sec. 11 Twp. 33 Rge. 30 NE/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines

C NW NW
Lease Owner M Midwest Casing Pulling

Lease Name Leslie Well No. 1-11

Office Address Box F, Sublette, Kansas 67877

Character of Well (Completed as Oil, Gas or Dry Hole)

Oil

Date Well completed 12-20 19 59

Application for plugging filed 6-18-79 19 79

Application for plugging approved 6-19 19 79

Plugging commenced 8-6 19 79

Plugging completed 8-10 19 79

Reason for abandonment of well or producing formation

Non Commercial Value

If a producing well is abandoned, date of last production

May 19 70

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Thomas

Producing formation Morrow Depth to top 5750' Bottom 5770' Total Depth of Well 5908'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8 5/8"	1532'	0'
Production				2 7/8"	5908'	724'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pump 1 Sack of hulls & 5 sacks cement to bottom- Pressured to 750 lbs.
Displaced to 724'
Pumped 35 sacks cement 724' to 624'
Displaced to 40'
Put bridge & 10 sacks cement 40' to 0'.
Cut off 8 5/8" 42" below ground level.

RECEIVED
STATE CORPORATION COMMISSION

AUG 28 1979

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pulling

Box F, Sublette, Kansas 67877 Permit # 776

STATE OF KANSAS COUNTY OF HASKELL, ss.
I Edgar J. Eves (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edgar J. Eves
Box F, Sublette, Kansas 67877
(Address)

SUBSCRIBED AND SWORN TO before me this 11 th day of August, 19 79

Sandra L Eves
Notary Public.

commission expires 12-6-80



DRILLER'S LOG

MESA PETROLEUM CO.

WELL: 1-11 Leslie, C NW NW Section 11, T33S-R30W, Meade County, Kansas


0-220	sand and redbed
220-920	redbed
920-1110	redbed and sand
1110-1370	sand and lime
1370-1720	anhy and shale
1720-2220	red shale and sand
2220-2710	anhy and shale
2710-3845	lime and shale
3845-4580	sand and shale
4580-5370	lime and shale
5370-5600	sand and shale
5600-5700	lime
5700-5905	sand and shale
5905	Total Depth

RECEIVED
 THE CORPORATION COMMISSION
 MAY 7 1970
 CONSERVATION DIVISION
 Wichita, Kansas

TOPS:

Herrington	2732
Heebner	4430
Lansing	4578
Kansas City	5034
Marmaton	5212
Cherokee	5372
Atoka	5530
Morrow	5700
Mississippi	5796

I certify that the above information is true and correct as per the logs kept during the drilling of the above subject well.


 J. L. Farrell, Production Superintendent

STATE OF TEXAS
 COUNTY OF POTTER

SUBSCRIBED BEFORE ME A NOTARY PUBLIC THIS 5th of April, 1970.

My Commission Expires 6-1-71

