

15-175-10009-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Seward County, Sec. 16 Twp. 33 Rge. 33 (E) (W)

Location as "NE/CNWxSWx" or footage from lines C NW SE

Lease Owner: Anadarko Production Company

Lease Name Keller "A" Well No. 1

Office Address Box 351, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 11-12 1962

Application for plugging filed 4-28 1964

Application for plugging approved 4-30 1964


Plugging commenced 5-12 1964

Plugging completed 5-12 1964

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 10-23 1963

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

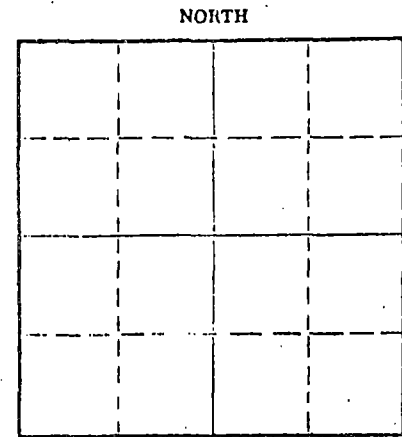

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott

Producing formation Chester Depth to top _____ Bottom _____ Total Depth of Well 6210 Feet

Show depth and thickness of all water, oil and gas formations:

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8	53	None
				8 5/8	1601	None
				4 1/2	6204	2676

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mixed 25 sxs of cement pumped plug to 6000' Spotted 35 sxs cement @700' spotted 15 sxs cement @45'

RECEIVED
STATE CORPORATION COMMISSION
5-14-64
MAY 14 1964

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargents Casing Pulling Service

Address 121 West Ninth, Liberal, Kansas

STATE OF KANSAS, COUNTY OF SEWARD, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

S. H. Neithercoat
Supt. Drilling & Production

(Signature) S. H. Neithercoat

Box 351, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of May, 1964.

Donald L. Anderson
(Signature)

Notary Public.

My commission expires _____

MY COMMISSION EXPIRES SEPT. 29, 1964

15-175-10009-00-00


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- ANADARKO PRODUCTION CO.
Farm- Keller "A" No. 1

SEC. 16 T. 33 R. 33W
C NW SE

Total Depth. 6210'
Comm. 10-7-62 Comp. 10-32-62
Shot or Treated.
Contractor. Bennett & Roberts
Issued. 2-16-63

County Seward
KANSAS



Elevation. 2848' GL

Production. 31 BOPD

CASING:

13 3/8" 53' cem w/75 sx.
8 5/8" 1601' cem w/775 sx.
4 1/2" 6204' cem w/150 sx.

Figures indicate Bottom of Formations.

sand	500
red bed & shells	666
red bed	920
red bed & gypsum	1080
sand	1260
red bed & sand	1576
anhydrite	1615
red bed	1890
red bed & shale	2190
shale & lime	2902
lime	3508
shale & lime	3850
lime	4090
lime & shale	4410
lime	5374
lime & shale	5993
lime	6080
sand & lime	6120
lime	6180
lime & shale	6196
lime	6210
Total Depth	

TOPS: LOG

Krider	2623
Winfield	2710
Council Grove	2958
Toronto	4268
Lansing	4392
Marmaton	5057
Morrow	5611
Chester	5850
1st Sand	6082 - 6110
2nd Sand	6116 - 6178
3rd Sand	6153 - 6157
Ste. Genevieve	6181

RECEIVED
STATE CORPORATION COMMISSION
JUL 10 1964
CONSERVATION DIVISION
Wichita, Kansas