


Send to state

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

15-077-10097-0000

WELL PLUGGING RECORD

NORTH

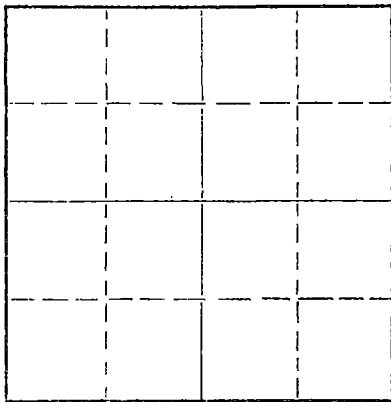

Locate well correctly on above  
Section Plat

Harper County. Sec. 23 Twp. 31S Rge. 9W (E) (W)  
Location as "NE/CNW/SW" or footage from lines. NE NW SE  
Lease Owner Mull Drilling Company  
Lease Name Martin Well No. #1  
Office Address c/o Joe Butts, Medicine Lodge, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed yes 19  
Application for plugging approved yes 19  
Plugging commenced 3-11-62 19  
Plugging completed 3-18-62 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel  
Producing formation Depth to top Bottom Total Depth of Well 4386' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				4 1/2"		3,023'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

RECEIVED  
STATE CORPORATION COMMISSION

Measured into total depth. Sanded back to 4100'. Dumped 5 sacks of cement.

APR 13 1962

Worked & shot casing @ 3600' - 3500' - 3300' 4 1/2" casing freed @ 3023'.

CONSERVATION DIVISION  
Wichita, Kansas

Built rack & slide.  
Pulled & layed down casing.

Squeezed well ## with 15 sacks of mud & 70 sacks of cement.

Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P.O. BOX 221, Great Bend, Kansas.

STATE OF Kansas, COUNTY OF Barton, ss.  
J.O. Forbes

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes  
Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 26 day of March, 1962

My commission expires April 8, 1965

Arthur F. Trubel  
Notary Public.



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,

Wichita, Kansas


15-077-16097-0000

Company- MAGNOLIA PETROLEUM CO.  
Farm- Martin No. 1

SEC. 23 T. 31 R. 9.  
NE NW SE

Total Depth. 4480'  
Comm. 3-5-55 Comp. 4-16-55  
Shot or Treated.  
Contractor. Noble Drlg. Co.  
Issued. 6-18-55

County Harper  
KANSAS



Elevation. 1577' DF

CASING:  
8 5/8" 210' cem w/250 sx  
4 1/2" 4479' cem w/175 sx

Production. State Pot. 53 BOPD &  
45 B. in 24 hrs,  
Allowable 25 BOPD

Figures indicate Bottom of Formations

sand & red bed	211
red bed & shale	371
shale & lime	1725
lime	1915
lime & shale	1947
lime	2100
lime & shale	3732
lime	4365
Mississippi chert	4450
lime & chert	4480
Total Depth	

Tops: (Schlumberger)

Heebner	3426
Douglas	3464
Lansing	3605
Mississippi	4354

*[Faint, illegible handwritten notes or stamps]*