

TO: . . .
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-20644-00-00
Spot: CNWSNW Sec/Twnshp/Rge: 22-34S-21W
1650 feet from N Section Line, 990 feet from E Section Line
Lease/Unit Name: BARBY-HARPER Well Number: 9-22
County: CLARK Total Vertical Depth: 4720 feet

Operator License No.: 5055
Op Name: C. H. TODD, INC.
Address: 1000 N. TYLER
WICHITA, KS 67212

Conductor Pipe: Size 13.375 feet: 331 \$153.40
Surface Casing: Size 8.625 feet: 840 WITH 600 SX CMT
Production: Size 4.5 feet: 4498 WITH 150 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 01/17/2003 2:25 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND TO 4221' WITH 4 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 150 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 01/17/2003 3:00 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


20" CONDUCTOR SET @ 86'. PBT D 4454'. PERFS AT 4284-4295'. SAND TO 4221' WITH 4 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 150 SX CMT. MAXIMUM PRESSURE 600#. SHUT IN PRESSURE 400#.

RECEIVED
JAN 27 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3412' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

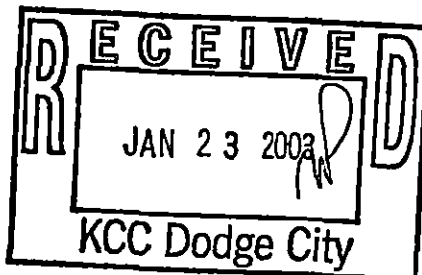

Signed

(TECHNICIAN)

INVOICED

DATE 1-28-03

INV. NO. 2003061118

Form 100-3/03