

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-20593-00-00
Spot: CNWNWSE Sec/Twnshp/Rge: 22-34S-21W
330 feet from N Section Line, 330 feet from W Section Line
Lease/Unit Name: BARBY-HARPER Well Number: 6-22
County: CLARK Total Vertical Depth: 4475 feet

Operator License No.: 5055
Op Name: C. H. TODD, INC.
Address: 1000 N. TYLER
WICHITA, KS 67212

Conductor Pipe: Size 13.375 feet: 375 8145.44
Surface Casing: Size 8.625 feet: 851 WITH 600 SX CMT
Production: Size 4.5 feet: 4474 WITH 175 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 01/17/2003 8:40 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND TO 4217' WITH 4 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 150 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 01/17/2003 11:00 AM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

20" CONDUCTOR SET @ 86'. PBTD 4433'. PERFS AT 4289-4296'. SAND TO 4217' WITH 4 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 150 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 100#.

RECEIVED


JAN 27 2003

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3400' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

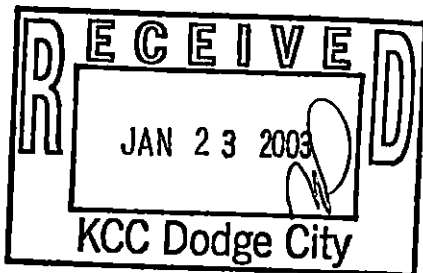

Signed

(TECHNICIAN)

INVOICED

DATE 1-28-03

INV. NO. 2003061118