


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biting Building  
Wichita, Kansas

## WELL PLUGGING RECORD

NORTH

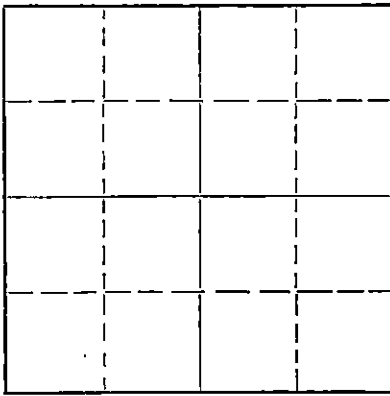

Locate well correctly on above  
Section Plat

Sumner

County. Sec. 2 Twp. 30S Rge. 1 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NE NE SE

Lease Owner. Beardmore Drilling Co.

Lease Name. Stunkel

Well No. 1

Office Address. 603 Petroleum Bldg.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-11-2 1954

Application for plugging filed 12-11-2 1954

Application for plugging approved 12-11-2 1954

Plugging commenced 12-11-2 1954

Plugging completed 12-11-2 1954

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. G. Buffington

Producing formation Depth to top Bottom Total Depth of Well 3906 Feet

Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface soil		0	15			
Sand		15	25			
Shale & shell		25	159	8-5/8	159	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud 159' to 3906'

Wood plug @ 159'

15 sacks cement 114' to 159'

Heavy mud 35' to 114'

Wood plug @ 35'

10 sacks cement 0 to 35'

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Beardmore Drilling Co.

Address 603 Petroleum Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Heber Beardmore, Jr., (employee of Beardmore Drilling Co.) (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) BEARDMORE DRILLING CO. Heber Beardmore, Jr.

603 Petroleum Bldg.

(Address)

SUBSCRIBED AND SWORN TO before me this 7<sup>th</sup> day of December, 1954

My commission expires 10-14-57

Patricia Lujan

Notary Public.

24-7366-5 3-53-20M

PLUGGING  
FILE SEC 2 T 30S R 1W  
BOOK PAGE 81 LINE 32

12-20-54

15-191-00622-00-00

STUNKEL #1NE NE SE Sec. 2-30S-1W  
Sumner County, KansasDrilled for: Beardmore & Sutton  
Drilled by: Beardmore

## Casing Record:


159' of 8-5/8" w/115 sacks

Drilling Commenced: 11/18/1954  
Drilling Completed: 12/2/1954Elevation: DF 1239  
KB 1241


<u>FORMATION</u>	<u>DEPTH</u>
Cellar	5
S. Soil	n 15
Sand	25
B. Shale & Shells	159
Shale & Lime	410
Shale & Lime	1225
Shale & Lime	2110
Shale & Lime	2430
Shale-Sandy	2500
Shale & Lime	2660
Shale & Lime	2820
Lime	2915
Lime	2977
Shale & Lime	3040
Shale & Lime	3105
Shale & Lime	3305
Shale & Lime	3379
Lime & Chert	3410
Lime & Chert	3423
Shale & Lime	3465
Lime & Chert	3530
Lime	3585
Lime	3635
Lime & Shale	3660
Lime	3665
Lime & Shale	3735
Lime, Chert, Shale	3760
Lime & Shale	3825
Lime, Shale, Sand	3844
Lime & Shale      Total Depth	3907
<u>TOPS:</u>	
Stolnaker	2625
Kansas City	2796
Mississippi	3379
Simpson	3835

DST #1 3378-3423, Open 1 hour, shut in 15 minutes, weak blow throughout, recovered 30' mud, IFO, FFO, BHP 75, I Hydro 1825, F Hydro 1785.

DST #2 3839-3844, Weak blow open 2 hours, shut in 15 minutes, recovered 30' of gas cut and slightly oil cut mud, BHP 489 not max.


STATE OF KANSAS }  
COUNTY OF SEDGWICK } SS

I, the undersigned, being duly sworn on oath state that the above and within statement is a true and correct record and log of the well drilled on the location above described, to the best of my knowledge and ability.



Subscribed and sworn to before me this 9th day of December, 1954.

My Commission Expires 1/28/56

  
Notary Public