

15-151-00164-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Pratt County. Sec. 18 Twp. 28S Rge. 13W(E) (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. 330' W and 330' S of NE Cor

Lease Owner. The Barnsdall Oil Co

Lease Name. B. A. Barnes Well No. 1

Office Address. Box 2039, Tulsa, Okla.

Character of Well (completed as Oil, Gas or Dry Hole). Dry Hole

Date well completed. August 17th, 1944 19

Application for plugging filed. August 17th, 1944 19

Application for plugging approved. August 17th, 1944 19

Plugging commenced. August 17th, 1944 19

Plugging completed. August 17th, 1944 19

Reason for abandonment of well or producing formation. Day Hole

If a producing well is abandoned, date of last production. Dry Hole 19

Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. Eldon Petty

Producing formation. None Depth to top. Bottom. Total Depth of Well. 4625 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10 3/4"	315'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

Filled with heavy mud from TD of 4625' to bottom of 10 3/4" Surface Casing or 315'.
From 315' to 270' set 15 sack cement plug. From 270' to 25' hole filled with
heavy mud. From 25' to 5' set 10 sack cement plug.

PLUGGING
FILE 18-28-130
BOOK PAGE 128 LINE 42

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Barnsdall Oil Co
Address. Box 2039, Tulsa, Okla.

STATE OF Kansas, COUNTY OF Reno, ss.
V. A. Knight (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) V. A. Knight

Box 396, Burrton, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 21st day of August 1944


My commission expires Dec. 15th, 1947 Notary Public.

MATERIAL REPORT AND PLUGGING RECORD

Mail To: STATE CORPORATION COMMISSION
Conservation Division
800 Bitting Building
Wichita, Kansas

NOTICE: All questions on this form must be answered.

Company Operating The Barnsdall Oil Co
Office Address Box 2039, Tulsa, Okla.

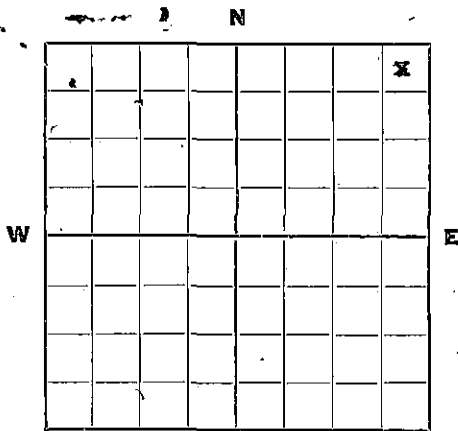

S
Locate well correctly.

County Pratt Sec. 18 Twp. 28S Rge. 13W

Farm Name B. A. Barnes Well No. 1 Field St. John

Well Location 330' W and 330' S of NE Cor

Name of Producing Sand Completed for a dry hole Total Depth 4625'

Commenced Plugging August 17th, 1944 Finished August 17th, 1944

DAILY AVERAGE PRODUCTION:

Initial Production: Oil _____ Gas _____ Water _____

Production when Plugged: Oil _____ Gas _____ Water _____

Estimated Total Remaining Reserves Attributable to Well at Time Abandoned None - Completed for a dry hole

INFORMATION ON MATERIALS RECLAIMED FROM WELL

CASING, TUBING AND ROD DATA

Description	Size	Recovered		Junk		Reusable		Disposition Made Or To Be Made Of Usable Material
		Ft.	Tons	Ft.	Tons	Ft.	Tons	
Armco Spiral Weld Slip Jt. Csg. 29#	10 3/4"							315' run in hole - None recovered

SURFACE EQUIPMENT

Quantity	Description	*Condition	Est. Tons	Disposition Made Or To Be Made Of Reclaimed Material
				No surface equipment set

* Usable, Usable with minor repairs, or junk.

Date: August 21st, 1944

Signed: [Signature] **Dist. Supt.**
(For Operating Co.—Title)

(See note on reverse side)

FORM—FP-1

20-2554

4-44-3M

PLUGGING
 FILE 18 28 R 13W
 BOOK PAGE 128 42

AUG 22 1944

It is very important that all questions on this form be answered, as this Department has been asked by the Petroleum Administration for War to supply data on well abandonments undertaken during the war.

This information is very essential in aiding the war effort; therefore, this Department is requiring this report to be mailed within 5 days after the abandonment of your well.

LOG RECORD
B. A. BARNES NO. 1

LOCATION:

330' W and 330' S of NE Cor of Sec.18-28S-13W,
Pratt County, Kansas

CONTRACTOR: Hinkle Drilling Co
DRILLING COMM: July 15th, 1944
DRILLING COMP: August 17th, 1944

INITIAL PRODUCTION:

COMPLETED FOR A DRY HOLE AT A TOTAL DEPTH OF 4625

CASING RECORD:

10 3/4" OD 29# Armco Spiral Weld SJ Casing set at 315' and cemented with 225 Sacks Cement

FORMATION RECORD:

Surface Soil	0	5	Lime	3145	3190
Clay	5	60	Broken Lime	3190	3230
Sand	60	135	Lime	3230	3270
Red Rock & Shale	135	270	Broken Lime	3270	3330
Red Rock & Shells	270	315	Shale	3330	3360
Red Rock	315	760	Lime	3360	3460
Anhydrite	760	780	Shale	3460	3470
Shale & Shells	780	885	Lime	3470	3690
Shale	885	1260	Broken Lime	3690	3800
Shale & Lm Shells	1260	1410	Shale	3800	3890
Lime Broken	1410	1510	Lime	3890	4140
Lime Shells & Shale	1510	1855	Lime & Shale	4140	4168
Lime	1855	2185	Broken Lime	4168	4179
Lime & Shale	2185	2235	Lime	4179	4200
Lime	2235	2450	Shale	4200	4215
Blue Shale	2450	2500	Shale & Lime	4215	4255
Lime	2500	2590	Lime	4255	4282
Shale & Shells	2590	2650	Chaty Lime	4282	4295
Shale	2650	2715	Shale	4295	4310
Shale & Shells	2715	2830	Cherty Lime	4310	4325
Shale	2830	3010	Shale	4325	4365
Lime & Shale	3010	3045	Lime	4365	4406
Broken Lime	3045	3065	Lime & Chert	4406	4425
Lime & Shale	3065	3095	Lime	4425	4465
Shale & Shells	3095	3145	Shale	4465	4470
			Simpson Sand	4470	4475
			Sandy Dolomite(Cored)	4475	4480
			Sand	4480	4490
			Sand & Lime	4490	4500
			Shale	4500	4569
			Lime (Arbuckle)	4569	4625

PLUGGING
 FILE NO. 28 R 134
 BOOK PAGE 28 LINE 42

I, V. A. Knight, being first duly sworn, on oath state that I have knowledge of the facts and matter herein set forth and that the same are true and correct.

V. A. Knight
Dist. Supt.

Sworn and subscribed to before me this 19th day of 1944

My Commission expires Dec. 15th, 1947

J. Franklin
Notary Public