


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

15-007-30189-00-00

Barber County. Sec. 19 Twp. 31S Rge. 10W (E) (W)  
Location as "NE/CNWxSWx" or footage from lines C SE NW  
Lease Owner E. K. Edmiston  
Lease Name McNabb-McCarty Well No. -1-  
Office Address First National Bank Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) dry hole  
Date well completed October 4 1965  
Application for plugging filed October 4 1965  
Application for plugging approved October 4 1965  
Plugging commenced October 5 1965  
Plugging completed October 5 1965  
Reason for abandonment of well or producing formation dry hole

NORTH

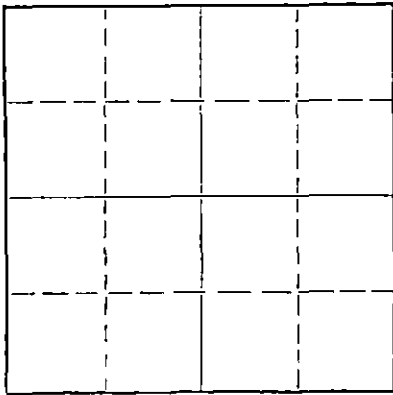

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well A. Elving  
Producing formation Depth to top Bottom Total Depth of Well 4600 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	275'	---

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 260' plug and 255 sacks cement,  
heavy mud to 40' plug and 10 sacks cement  
job completed 6:15 a.m.

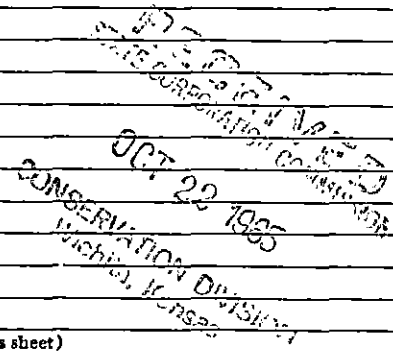

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E. K. Edmiston Drilling Co., Inc.  
Address 425 First National Bank Building, Wichita, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK  
E. K. Edmiston, owner and operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. K. Edmiston  
425 First National Bank Bldg., Wichita, Kansas (Address)

Subscribed and sworn to before me this 21st day of October, 1965

My commission expires August 25, 1968

A. B. Bargaen Notary Public.



DRILLER'S LOG

Company: E. K. Edmiston  
 425 First National Bank Building  
 Wichita, Kansas 67202

Rotary Drilling Commenced: September 24, 1965

Rotary Drilling Completed: October 5, 1965

Well Name: McNABB-McCARTY No. 1  
 c SE NW 19-31S-10W  
 Barber County, Kansas

Contractor: E. K. Edmiston Drilling Co., Inc.  
 425 First National Bank Building  
 Wichita, Kansas 67202

Casing Record: 275' of 8-5/8" with 250 sacks cement

L O G

Measurements from top of Kelly bushing

Surface soil and sand	0 - 40
Sand	155
Red Bed	275
Red Bed	427
Shale	1525
Shale and Lime	1860
Lime and Shale	2175
Shale and Lime	3212
Lime and Shale	4048
Lime	4535
Mississippi	4600 RTD

RECEIVED  
 STATE CORPORATION COMMISSION  
 OCT 22 1965  
 CONSTRUCTION DIVISION  
 WICHITA, KANSAS

The undersigned, E. K. Edmiston, President of E. K. Edmiston Drilling Co., Inc., hereby certifies on behalf of said company, that the above log is a true and correct log of the formations encountered in drilling the above well, as reflected by the daily drilling reports.


E. K. EDMISTON DRILLING CO., INC.

By E. K. Edmiston  
 E. K. Edmiston, President

STATE OF KANSAS,  
 SS:  
 SEDGWICK COUNTY,

BE IT REMEMBERED that on this 20th day of October, 1965, before me, the undersigned, a Notary Public, in and for the county and state aforesaid, came E. K. Edmiston, known to me to be the same person who executed the foregoing instrument as President and on behalf of the E. K. Edmiston Drilling Co., Inc., and he duly acknowledged the execution of the same for himself and for said company.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal on the day and year last above written.



A. B. Barga  
 A. B. Barga, Notary Public

My commission expires  
 August 25, 1968