


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

15-191-01519-00-01

WELL PLUGGING RECORD

NORTH

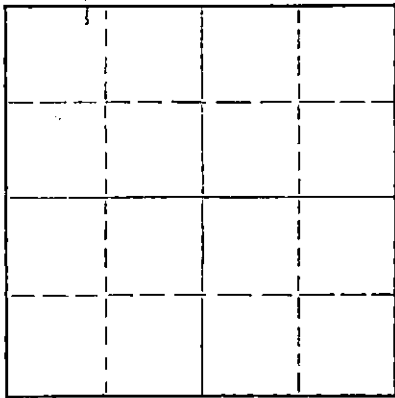

Locate well correctly on above
Section Plat

Sumner County. Sec. 5 Twp. 34S Rge. 4 (W)
Location as "NE/CNW/SW" or footage from lines 330' from south line, 990'
Lease Owner Quality Supply Co. from west line of NW/4
Lease Name NETAHLA RECEIVED No. 2
Office Address 6320 Jacqueline, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) SWD well
Date well completed October 19 61
Application for plugging filed 3-21 19 67
Application for plugging approved 19
Plugging commenced 3-21 CONSERVATION DIVISION 19 67
Plugging completed 3-21 Wichita, Kansas 19 67
Reason for abandonment of well or producing formation Lease abandoned

If a producing well is abandoned, date of last production dry hole 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Howard Hesse
Producing formation Fort Riley Depth to top 1290 Bottom 1300 Total Depth of Well 1300 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Fort Riley	8 5/8"	0	372'	8 5/8"	372'	None
	2 7/8"	0	1290'	2 7/8"	1290'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 10 sax Jel, followed with 10 sax cement. Displaced with water to 500'. Mud to 1260'. Cement to top.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Globe Cementing Co.
Address Kiowa, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Quality Supply Company (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack Shear
By: Jack Shear
6320 Jacqueline, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 23 day of March, 19 67

Evelyn V. North
Evelyn V. North Notary Public.

My commission expires December 22, 1970

15-191-01519-00-01

SP

Sunray Mid-Continent Oil Company

Netahla No. 2

DRILLER'S LOG

Clay & Shale	0- 70'
Shale & Shells	70- 815'
Anhydrite	815- 865'
Shale & Salt	865- 910'
Shale & Lime	910- 985'
Shale, Shells & Salt	985-1050'
Shale & Shells	1050-1110'
Shale & Lime	1110-1265'
Shale	1265-1290'
Lime	1290-1340'
Total Depth	1340'

RECEIVED
STATE CORPORATION COMMISSION

MAR 23 1967

CONSERVATION DIVISION
Wichita, Kansas