

15-191-20307-00-00

SR

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sumner

County, Sec. 6 Twp. 34 Rge. 4 (E) W (W)

Location as "NE/CNW/ESW" or footage from lines 150' SE of C NE NW

Lease Owner Mack Oil Company

Lease Name Misak

Well No. # 1

Office Address McCasland Bldg., Dunean, Okla. 73533

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed December 1971

Application for plugging approved December 1971


Plugging commenced January 25 1972

Plugging completed January 29 1972

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

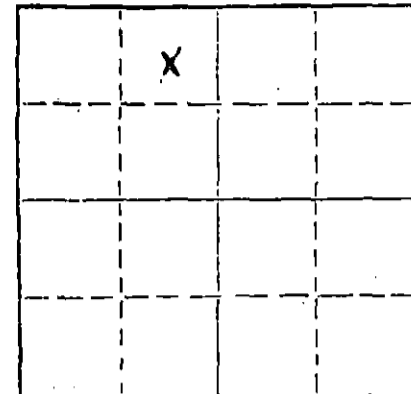

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eugene Graham

Producing formation Depth to top Bottom Total Depth of Well 4790 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	226	None
				4 1/2"	4789	4171

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

January 25, 1972 Plugged off bottom. Dump sand to 4700'. Mixed and dumped 4 sx of cement.

January 29, 1972 Plugged off top. Set 10' rock bridge at 210'. Mixed and dumped 30 sx of cement, mudded casing to 40'. Set 10' rock bridge, mixed and dumped 10 sx of cement from 30' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
FEB 10 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor RUSS CASING PULLING, INC.
Address P. O. BOX 1082, GREAT BEND, KANSAS 67530

STATE OF Kansas COUNTY OF Sedgwick ss.
J. Corry Tinsmon (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) J. Corry Tinsmon

812 Union Center, Wichita, KS 67202 (Address)

Subscribed and Sworn to before me this 9th day of February, 1972

Eva Jean Burright Notary Public.

My commission expires December 1, 1972



15-191-20307-00-00

R

MACK OIL COMPANY
Duncan, Oklahoma
73533

DRILLERS WELL LOG

#1 Misak 150' SE C NE NW - Section 6-34S-4W
Sumner County, Kansas
Commenced R.D. 10-28-71 Elevation: 1246' K.B.; 1239' G.L.
Completed R.D. 11-8-71 Dry & Abandoned
Rotary Total Depth: 4790' Contractor: Thomas Drilling Company, Inc.

STRATA	DEPTH
Shale & Redbed	0 - 60
Redbed & Shale	60 - 230
Lime & Shale	230 - 2620
Shale & Lime	2620 - 2851
Lime	2851 - 2931
Lime & Shale	2931 - 3600
Lime	3600 - 4155
Lime & Shale	4155 - 4268
Chat	4268 - 4381
Chat	4381 - 4423
Lime	4423 - 4637
Shale	4637 - 4702
Lime	4702 - 4752
Sand	4752 - 4790

RECEIVED
STATE CORPORATION COMMISSION
FEB 10 1972
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

MACK OIL COMPANY

By J. Corry Tinsmon
J. Corry Tinsmon

Signed and sworn to in my presence
this 9th day of February, 1972, by
J. Corry Tinsmon, representative
of Mack Oil Company.....

Eva Jean Burright
Eva Jean Burright, Notary Public

My commission expires December 1, 1972

