


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

NORTH

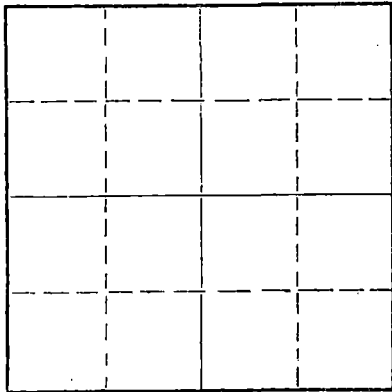

Locate well correctly on above  
Section Plat

15-191-20135-00-00

Form CP-4

WELL PLUGGING RECORD

Sumner County. Sec. 8 Twp. 30 S Rge. 1 W (W)  
Location as "NE/CNW/SW" or footage from lines SE NE NW  
Lease Owner Beardmore Drig. Co.  
Lease Name DeWitt Well No. 1  
Office Address 700 One Twenty Bldg, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 5-4 19 69  
Application for plugging filed 5-4 19 69  
Application for plugging approved 5-4 19 69  
Plugging commenced 5-4 19 69  
Plugging completed 5-4 19 69  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Howard Hess  
Producing formation Depth to top Bottom Total Depth of Well 4037 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	375'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 300', hulls, plug and 25 sacks cement.  
Mud to 40', hulls, plug and 10 sacks cement.  
Rathole capped with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 12 1969  
CONSERVATION DIVISION  
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor WHITE & ELLIS DRILLING, INC. License #209  
Address Box 448, El Dorado, Kansas 67042

STATE OF KANSAS, COUNTY OF BUTLER, ss.  
Howard E. Russell, employee of contractor (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Howard E. Russell  
Box 448, El Dorado, Kansas  
(Address)

Subscribed and sworn to before me this 8th day of May, 1969

My commission expires May 21, 1972  
Ernest Siffard Notary Public.



99

## CASING RECORD

8 5/8

375' Cemented  
w/225 sacks

Location: SE NE NW  
 Section: 8-30S-1W  
 Sumner County, Kansas  
 Farm: DeWitt #1  
 Well Owner: BEARDMORE DRILLING CO.  
 Contractor: WHITE & ELLIS DRILLING, INC.  
 Commenced: 4-22-69  
 Completed: 5-4-69

T. D.

4037'

KELLY BUSHING MEASUREMENT 5' ABOVE GROUND LEVEL.

FORMATION	DEPTH
Cellar	0-9
Shale w/Lime (stks.)	195
Anhydrite	381
Lime & Shale (stks.)	800
Shale & Lime	1820
Shale w/Lime (stks.)	1880
Sand & Shale	1910
Lime & Shale	2665
Sdy. Shale	2745
Shale & Lime	2775
Shale	2943
Lime	3167
Shale & Lime	3390
Lime & Shale	3561
Shale & Lime	3587
Lime	3930
Shale	4013
Sand	4037

TOPS

Kansas City	2955
Mississippi	3587
Kinderhook	3930
Simpson	4013

Dry Hole, Plugged

&amp; Abandoned

Core #1

3596 - 3611

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAY 12 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas