
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

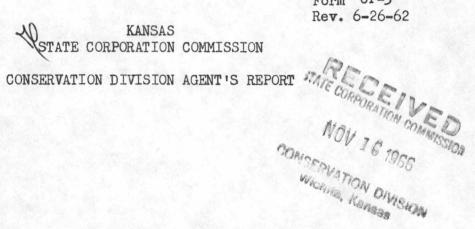

	49
Operator's Full Name Charles J. Richar	·d
Complete Address: 1329 First National	Bank Bldg., Oklahoma City, Oklahoma
Lease Name Landis	Well No. # 1
Location NE SE SE	Sec. 21 Twp. 34 Rge. 11 (E) (W) W
County Barber	Total Depth 4650'
Abandoned Oil Well X Gas Well Input	t Well D & A
Other well as hereafter indicated:	
Plugging Contractor: Clarke Corporati	on, Inc.
Address: Chapin Bldg., Medicine Lodg	e, Kansas License No. 583
Operation Completed: Hour 9:45AM Day 1	.4th Month Nov. Year 1966
The Above well was plugged as follows:	
271' of 8 5/8" surface pipe, cement	circulated. 4606' of $4\frac{1}{2}$ " long string,
cemented with 50 sacks. Top perfera	tion 4600'. Bottom of the hole was sand
to 4580°, and cemented with 3 sacks	, through the dump bailer. 4230' of $4\frac{1}{2}$ "
long string was recovered from the	hole. Bridge plug was pushed in fluid t
250', rock bridge from 250' to 240'	. 4 sacks of cement was mixed in a barr
and put on plug at 240', through th	e dump bailer, and let set over-week en
	and 21 sacks of cement was added to the mud to 40', rock bridge from 40' to 30' ase of the cellar.
I hereby certify that the above well was plu	
INVOICED	Signed: Online Elving
DATE 11/10/66 0	Well Plugging Supervisor
INV. NO. 4253-W	