

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-075-20390-00-00
Spot: SWSW Sec/Twnshp/Rge: 35-22S-40W
660 feet from S Section Line, 660 feet from W Section Line
Lease Name: GROVES Well #: 1-35
County: HAMILTON Total Vertical Depth: 2690 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, LLC
Address: 6100 N WESTERN AVE PO BOX 18496
OKLAHOMA CITY, OK 73118

| String | Size | Depth (ft) | Pulled (ft) | Comments |
|--------|-------|------------|-------------|-----------------|
| PROD | 4.5 | 2687 | 0 | WITH 550 SX CMT |
| SURF | 8.625 | 350 | | WITH 280 SX CMT |

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 02/09/2015 9:30 AM
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (620) 277-0803

Proposed Plugging Method: PUMP 200# HULLS & 100 SX CMT DOWN 4 1/2" CASING. DISPLACE TO 1100' WITH WATER. RUN CBL & DETERMINE TOC. PERFORATE AND/OR RUN TBG AS REQUIRED. CHECK ANNULUS.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 02/09/2015 2:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

PUMP 100 SX CMT WITH 200# HULLS DOWN 4 1/2" CASING TO 2640'. DISPLACE WITH WATER TO 1300'. PRESSURE TEST CASING TO 600#. HOLDING. RUN CBL FROM 1200' TO 40'. TOC @ 94'. RUN TBG TO 1102'. FILL 4 1/2" CASING WITH CMT FROM 1102' TO 0' USING 80 SX CMT. TOOH WITH TBG & TOP OFF WITH 15 SX CMT. PUMP 20 SX CMT DOWN THE ANNULUS TO 250#.

Perfs:

| Top | Bot | Thru | Comments |
|------|------|------|----------|
| 2632 | 2640 | | |

KCC WICHITA
MAR 02 2015
RECEIVED


Remarks: **COMPLIANCE ISSUE: DENIED TA LACK OF LEASE** USED 60/40 POZMIX 4% GEL BY CONSOLIDATED.

Plugged through: TBG


MAR 04 2015 CKM

District: 01

Signed

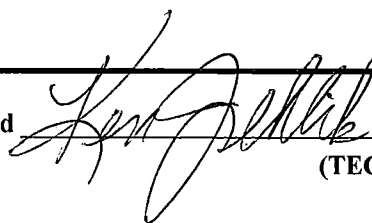

(TECHNICIAN)



RECEIVED
FEB 13 2015
KCC DODGE CITY