

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-21812-00-00  
Spot: NWSE Sec/Twnshp/Rge: 3-34S-32W  
1980 feet from S Section Line, 1980 feet from E Section Line  
Lease/Unit Name: EVA Well Number: 2-3  
County: SEWARD Total Vertical Depth: 6500 feet

Operator License No.: 30604  
Op Name: RAYDON EXPLORATION, INC.  
Address: 9400 N. BROADWAY #400  
OKLAHOMA CITY, OK 73114

Conductor Pipe: Size 20 feet: 40  
Surface Casing: Size 8.625 feet: 1657 WITH 725 SX CMT  
Production: Size 4.5 feet: 3142 WITH 125 SX CMT  
Liner: Size feet: 821.25

Well Type: OG UIC Docket No: Date/Time to Plug: 08/28/2001 11:30 AM  
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.  
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGIN Phone: (580) 854-6515

Proposed Plugging Method: PUMP 20 SX CMT & 200# HULLS OVER PERFS. 1ST PLUG AT 1680' WITH 50 SX CMT. 2ND PLUG AT 500' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 08/28/2001 1:30 PM KCC Agent: STEVE MIDDLETON

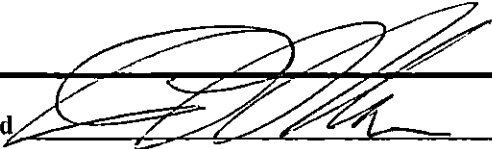
Actual Plugging Report:

PBTD 3083'. PERFS AT 2660-2668'. 1ST PLUG PUMP 20 SX CMT & 200# HULLS OVER PERFS. 2ND PLUG PULL CASING TO 1680'. LOAD HOLE WITH MUD. PUMP 50 SX CMT. 3RD PLUG PULL TO 500' & PUMP 40 SX CMT. 4TH PLUG PULL TO 40' PUMP 10 SX CMT TO SURFACE. STAYED FULL.


Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 2230' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

Signed  (TECHNICIAN)

RECEIVED  
AUG 31 2001  
KCC WICHITA

INVOICED  
DATE 8-31-01 AUG 29 2001  
INV. NO 2002060319 

Form  23