

STATE OF KANSAS
STATE CORPORATION COMMISSION

API #15-189-20533


RECEIVED
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

JAN 11 1982

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stevens County, 36 Twp. 34S Rge. 35 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SW $\frac{1}{4}$ SW $\frac{1}{4}$
Lease Owner Cities Service Company
Lease Name Hilbig B Well No. 1
Office Address 3545 N.W. 58th Street Oklahoma City, OK 73112
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole
Date Well completed 11-23-1981
Application for plugging filed 11-12-1981
Application for plugging approved 19
Plugging commenced 11-20-1981
Plugging completed 11-23-1991
Reason for abandonment of well or producing formation
No commercial quantities of oil or gas were found.
If a producing well is abandoned, date of last production
N.A. 19
Was permission obtained from the Conservation Division or
its agents before plugging was commenced? YES

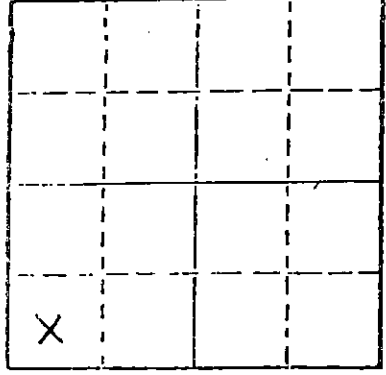

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation None Depth to top Bottom Total Depth of Well 6856'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	2608'	0'
				5-1/2"	6840'	2566'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set Baker cast iron bridge plug at 6450'.
Dumped 2 sacks cement on top of plug.
Shot 5-1/2" casing at 2670'.
Loaded hole with drilling mud.
Spotted cement plug from 2560 to 2655'.
Loaded hole with drilling mud.
Spotted cement plug from 930 to 1000'.
Loaded hole with drilling mud.
Spotted cement plug from 0' to 40'.
Cut off 8-5/8" casing 5' below ground level and welded on cap with name and date.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco Casing Pullers

STATE OF Oklahoma COUNTY OF Oklahoma, ss.

Delbert G. Oliver (employee of owner) or ~~(owner)~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Delbert G. Oliver Delbert G. Oliver
Engineering Manager
3545 N.W. 58th Street, Oklahoma City, OK 73112
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of January, 1982

Joyce S. Darter
Joyce S. Darter Notary Public.

My commission expires 6-10-84