


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202

Form CP-4  
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Barber SEC. 29 TWP. 34S RGE. 11 W  
Location as in quarters or footage from lines:  
C SE

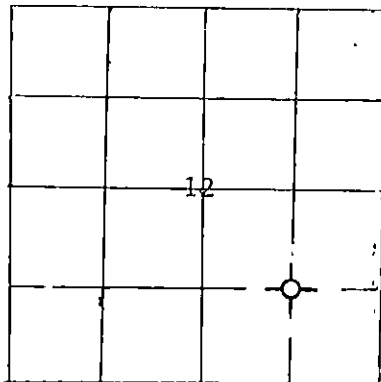

Locate Well  
correctly on above  
Section Platt.

Lease Owner Wild Boys & The Silver Bullet  
Lease Name Shklar Well No. 2  
Office Address \_\_\_\_\_  
Character of Well (Completed as Oil, Gas or Dry Hole): Dry Hole  
Date Well Completed 12-22-81  
Application for plugging filed February 3, 1982  
Plugging commenced 12-22-81  
Plugging completed 12-22-81  
Reason for abandonment of well or producing formation \_\_\_\_\_

Lost Hole  
Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? Yes

\* Name of Conservation Agent who supervised plugging of this well Maurice Leslie  
Producing formation N/A Depth to top \_\_\_\_\_ bottom \_\_\_\_\_ T.D. 4640'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
Heebner		3696		8 5/8"	440	
Toronto		3708				
Douglas		3731				
LKC		4255				
B/KC		4510				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

150 sx cement at 132', bridge plug and 14 sx of 40', 15 sx in Rathole 5 sx in Mousehole. Common Cement + 2% Gel + 3% CaCl2 pumped into place. Cement pumped to break in pipe at 132', filled hole outside casing. Cemented solid from 132' to surface with wooden bridge plug at 40'. Mud fluids were left in pits and backfilled in place when sufficiently dry.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.  
R. A. Christensen (employee of owner) or (~~owner or operator~~) of the  
above-described well, being first duly sworn on oath, says: That I have knowledge of the  
facts, statements, and matters herein contained and the log of the above-described well as  
filed and that the same are true and correct. So help me God.

(Signature) RAC Christensen  
(Address) \_\_\_\_\_

SUBSCRIBED AND SWORN TO before me this 3rd day of February, 19 82

My Commission expires: Oct 29, 1982

RECEIVED  
STATE CORPORATION COMMISSION  
FEB - 4 1982

CONSERVATION DIVISION  
Wichita, Kansas

DONNA HALE ARD  
STATE NOTARY PUBLIC  
SEDGWICK COUNTY, KANSAS