


Replug, no charge!

15-151-10375-00-01

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

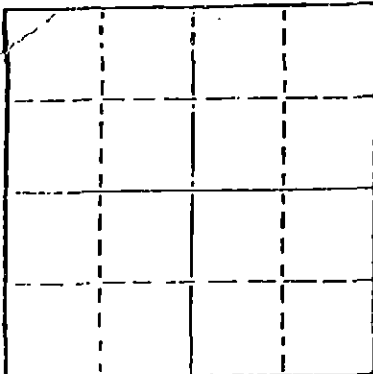

Locate well correctly on above
Section Plot

Pratt County Sec. 28 Twp. 28 Rge. 11 E/W
Location NE/CNW/SW or footage from lines
NW SW NW

Lease Owner Northern Natural Gas Co.
Lease Name Arminstead "B" Well No. 1
Office Address P.O. Box 88, Lyons, Kansas 67554
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 11-12 1940
Application for plugging filed 6-20 1977
Application for plugging approved 7-1 1977
Plugging commenced 11-16 1977
Plugging completed 11-19 1977

Reason for abandonment of well or producing formation
Failure to produce profitably
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Bill Owen, Pratt Kansas
Producing formation Viola Depth to top 4162' Bottom 4163' Total Depth of Well 4183'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	376'	NONE
				5-1/2"	4163'	3232'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Halliburton mixed and spotted 75 sacks of 50-50 poz-mix cement through the
drill pipe from 4184' to 707'. Halliburton mixed and spotted 30 sacks of
Class "A" cement from 346 back to 98'. Halliburton mixed add spotted 20
sacks of Class "A" Cement back to surface.

RECEIVED
STATE CORPORATION COMMISSION
NOV 28 1977

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this report)
Name of Plugging Contractor Sterling Drilling Co. Sterling, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
W. J. Luck (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) W. J. Luck
P.O. Box 88, Lyons, Kansas 67554
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of November, 1977

My commission expires Nov 3, 1979

David L. Allen
Notary Public.

