


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

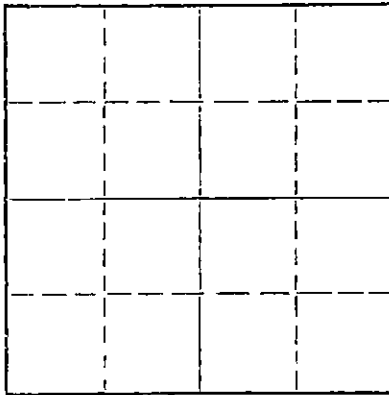

Locate well correctly on above
Section Plat

Pratt County, Sec. 23 Twp. 27S Rge. 15 (E) (W)X

Location as "NE/CNW/SW" or footage from lines NE SW NE
Lease Owner Braden - Deem Inc.
Lease Name Wilson Well No. 1
Office Address 210 One Twenty Building Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 11-5-69 19____
Application for plugging approved 11-6-69 19____
Plugging commenced 11-25-69 19____
Plugging completed 12-18-69 19____
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation Depth to top Bottom Total Depth of Well 4745 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	295	None
				5 1/2	None	2498

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved rig to Wilson lease. Dug out cellar. Set up pole. Set plug at 4379' and dumped 15' of sand. Set plug at 4100' and dumped 25' of sand. Rigged up jacks. Couldn't work pipe - braden head was welded to 5 1/2" casing.

Ran 5 sacks of cement on plug at 4075' with dump bailer. Had braden head cut off 5 1/2" casing and collar strapped to 5 1/2" casing. Worked casing to 24" tension at 2500' psi or 109,000 lbs. Worked and shot casing at 2517'. Worked casing loose. Built rack and slide. Pulled 46 joints of casing.

Finished pulling 30 joints of 5 1/2" casing. Loaded rig. Set plug at 290' and put in 10' rock bridge. Ran 4 sacks of cement with dump bailer. Tried to bail hole down - wouldn't bail down. Dumped 4 sacks of cement at 270'.

Tried to bail hole down - wouldn't bail down. Tore down rig. Cleaned out cellar, so braden head could be cut off and collar welded on. Allied squeezed well with 6 sacks of gel and 100 sacks of regular pozmix cement blended with 6% gel. Cement was pumped through 2" tubing at 270'.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas

(Address)

Subscribed and sworn to before me this 9 day of January, 1970

My commission expires May 27, 1973

Notary Public.



RECEIVED
STATE CORPORATION COMMISSION
NOV 6 1969
CONSERVATION DIVISION
Wichita, Kansas

DRILLER'S LOG

Braden Drilling, Inc. et al
WILSON #1
NE SW NE Sec. 23-27-15W
Pratt County, Kansas

Commenced: November 12, 1960


Completed: December 2, 1960

Set 8 5/8" at 293' and cemented
with 300 sacks cement.

Set 5 1/2" at 4570' and cemented
with 225 sacks cement.


Sand, gravel & shells	260 ft.
Shale and shells	295
Sand, shale, redbed	910
Redbed	990
Anhydrite	1030
Shale, shells	1980
Lime and shells	2080
Lime	2670
Lime and shale	2800
Lime	3005
Lime and shale	3225
Lime and shells	3295
Lime	3600
Lime and shale	3970
Lime	4555
Lime and chert	4605
Lime	4655
Shale and sand	4715
Kine	4745 T.D.

I hereby certify that this is a true and correct log of the above
captioned well, as shown by the daily drilling reports.


F. M. Callaway

Subscribed and sworn to before me this 21st day of December, 1961.

My commission expires March 21, 1962


Helen Schultz, Notary Public

