

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging of formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Pratt County, Sec. 25 Twp. 27S Rge. 15 (E) 15 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SE 1/4 NE 1/4 SE 1/4  
Lease Owner The Ohio Oil Company  
Lease Name J. C. Lemon Well No. 1  
Office Address P. O. Box 710, McPherson, Kansas.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed April 2, 1944 19  
Application for plugging filed April 4, 1944 19  
Application for plugging approved April 5, 1944 19  
Plugging commenced April 2, 1944 19  
Plugging completed April 2, 1944 19  
Reason for abandonment of well or producing formation non productive



Locate well correctly on above  
Section Flat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Ruel Durkee  
Producing formation None Depth to top Bottom Total Depth of Well 4820 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4	822'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.  
Mud from 4820 to 300'. Wood plug mud and cement from 300' to 262'. Wood plug, mud and cement from 262' to 10'. Set 10 sacks cement from 10' to bottom of cellar.

PLUGGING  
FILE 25 27S 15W  
BOOK PAGE 113 LINE 13

APR 14 1944  
04-14-44

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Ohio Oil Company, box 710, McPherson, Kansas.  
Address

STATE OF Kansas, COUNTY OF Sedgewick, ss.  
Burton C. Dunn (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Burton C. Dunn  
Box 86, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of April, 1944  
Madeline M. Robinson  
Notary Public.

My commission expires July 1 - 1946


The Ohio Oil Company  
J. C. Lemon well #1

SE/4 NE/4 SE/4  
Sec. 26 - 27S - 15W  
Pratt County, Kansas.

T. D. 4820  
Comm. 3-3-44  
Comp. 4-3-44  
Contractor - R. C. Patton Co

Casing Record  
10-3/4" - 32.75# LW set at 811'  
& cemented w/550 sacks.

Cellar	10	
Clay	20	
Sand	145	
Shale & sand	235	
Red bed, gravel & sand	355	
Red bed	365	
Gravel	590	
Shale, sandy red	750	
Red bed	885	
Anhydrite	920	
Sand	930	
Shale	1065	
Shale & shells	1560	
Shale & salt	1625	
Shale & shells	1760	
Lime & shale	1820	
Shale & shells	1930	
Lime & shale	2045	
Lime	2315	
Lime & shale	2350	
Lime hard	2385	
Lime	2610	
Lime & shale	2655	
Lime	2708	
Sand	2715	
Lime & shale	2775	
Lime broken	2835	
Lime & shale	4040	
Lime	4090	
Lime & shale	4120	
Lime	4123	
Lime & shale	4150	
Lime very hard	4185	
Lime	4290	
Lime & shale	4315	
Lime	4350	
Lime & shale	4380	
Shale & shells	4435	
Lime	4450	
Lime & shale	4460	
Sand	4474	(S. S. O. Faint oder)
Shale	4477	
Shale & Chert	4498	
Lime & chert	4579	
Lime	4592	
Lime & shale	4613	
Lime & Chert	4623	
Lime & sand	4641	
Shale & sand	4661	
Shale	4668	
Sand	4678	
Shale & sand	4731	
Lime & shale	4764	
Lime	4820	Total Depth

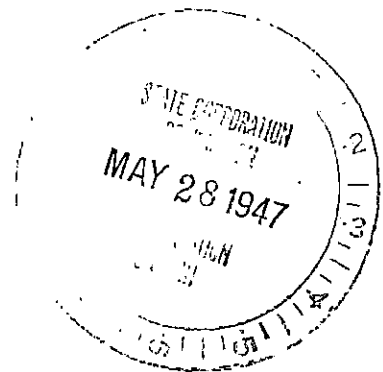

PLUGGING  
FILE SEC 26 T 27 S 15W  
BOOK PAGE 113 LINE 13