

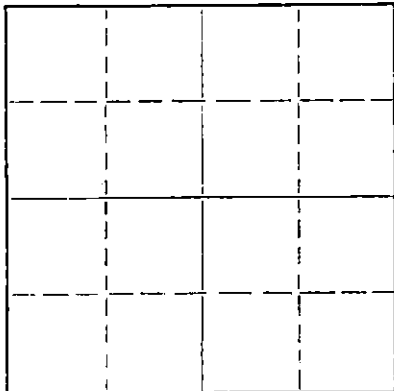
STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

Locate well correctly on above
Section Plat

Morton County, Sec. 18 Twp. 34S Rge. (E) 40 (W)

Location as "NE/CNW/SW" or footage from lines Ctr SE NW

Lease Owner Cities Service Oil Company

Lease Name Mingenback "B" Well No. 1

Office Address Box 1028, Guymon, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed 9-4 1966

Application for plugging filed 9-7 19 66

Application for plugging approved 9-9 19 66

Plugging commenced 9-15 19 66

Plugging completed 9-16 19 66

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well E. Eves, Sublette, Kansas

Producing formation Depth to top Bottom Total Depth of Well 6510 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow S-1	RECEIVED STATE CORPORATION COMMISSION	5491	5501	8 5/8	1651	None
	SEP 20 1966			4 1/2	5570	2438
	CONSERVATION DIVISION Wichita, Kansas					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Squeezed perforations 5491' to 5501' w/100 sacks common cement.

Shot off 4 1/2" casing @ 2440', pulled csg. and spotted cement plugs as follows: 50

sacks from 2440' to 2540', 35 sacks from 604' to 704' & 15 sacks from 35' to 4' of

ground level at which point the 8 5/8" casing was cut off and a steel cap welded on.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco Lease & Well Service

Address Borger, Texas

STATE OF OKLAHOMA, COUNTY OF TEXAS, ss.

H. E. Massey (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Massey-Dist. Supt.

Box 1028, Guymon, Oklahoma

(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of September, 1966

My commission expires 5-4-70

Gloyd L. Shockley

Notary Public.