

15-191-00079-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Summer

County. Sec. 35 Twp. 34S Rge. (E) 1 (W)

Location as "NE/CNW/SW" or footage from lines C N/2 NW NE

Lease Owner Sullivan & Leroux, et al

Lease Name Bacon "B"

Well No. 1

Office Address 1801 National Bank of Tulsa Building, Tulsa, Okla.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 7-12 19 60

Application for plugging filed 7-12 19 60

Application for plugging approved 7-12 19 60


Plugging commenced 7-12 19 60

Plugging completed 7-12 19 60

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

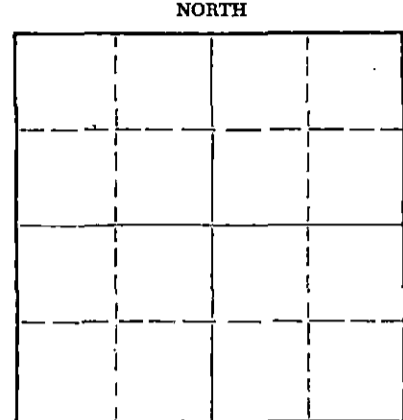

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Fred Hempel

Producing formation Depth to top Bottom Total Depth of Well 4258 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	320	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud to 300 feet. Set plug @ 300'. Placed 20 sacks cement on plug thru drill pipe by Halliburton. Filled with mud to 30 feet. Set plug @ 30 feet. Filled to 3 feet below surface with cement.

RECEIVED
STATE CORPORATION COMMISSION
JUL 27 1960
7-27-60
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Herndon Drilling Company
Address P. O. Drawer 489, Tulsa, Oklahoma

STATE OF OKLAHOMA, COUNTY OF TULSA, ss.
W. G. Prather (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. G. Prather
Lyons, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 19th day of July, 19 60.
My commission expires June 19, 1961
Johnnie Alene Frese Notary Public.



15-191-00079-0000

WELL LOG

Well: **BACON "B" NO. 1**
 Location: **C N/2 NW NE, Sec. 35-34S-1W,**
Sumner County, Kansas
 Owner: **Sullivan & Leroux, et al**

Spudding date: **6-24-60**
 Date casing set: **6-25-60**
 Date rotary completed: **7-12-60**
 Date cable completed:

<u>FROM</u>	<u>TO</u>	<u>FORMATION</u>	<u>REMARKS</u>
0	400	Surface Hole	Ran 8 joints Armco Spiral Weld 320'. Set @ 320, cemented w/250 sacks HA 5 cement.
400	2800	Lime & Shale	
2800	2807	Stalnaker	
2807	2920	Sand, Lime & Shale	
2920	3195	Lime & Shale	
3195	3270	Sand	
3270	3355	Lime & Shale	
3355	3780	Lime	
3780	3820	Shale	
3820	3932	Lime & Shale	
3932	4193	Lime	
4193	4245	Lime & Shale	
4245	4254	Lime, Chert & Shale	
4254	4258	Sand	
	4258	Total Depth	Plug w/20 sacks cement 300' 15 sacks @ 30'

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 27 1960
 CONSERVATION DIVISION
 Wichita, Kansas

Subscribed and sworn to before me this 15th
 day of July, 1960

I certify the above and foregoing to be a true and exact copy
 of the original driller's log on the BACON "B" NO. 1

Johnnie Albert Fesse
 Notary Public
 My commission expires:
June 19, 1961

HERNDON DRILLING COMPANY
C. T. Moore
 By: _____
 Title: **C. T. Moore, Asst. Secty.**