

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

OR

**Strike out upper line
when reporting plug-
ging off formations.**

FORMATION PLUGGING RECORD

NORTH

2-VI

34

31

5

**Locate well correctly on above
Section Plat**

Name of Conservation Agent who supervised plugging of this well.....W. T. Buffington

Producing formation..... Depth to top..... Bottom..... Total Depth of Well..... 1695 Feet

Show depth and thickness of all water, oil and gas formations.

[illegible]

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet tofeet for each plug set.

Filled with heavy rotary mud - bottom to 242' -
15 sacks cement - Heavy rotary mud - 20' - 10 sacks
cement

11 34 2W
73 18

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to..... A. F. Carson and Fred W. T. Smith
Address..... Union National Bank Bldg., - Wichita, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.

Clyde Pulso (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. 11/12

(Signature)

Wolcott Building - Hutchinson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of September, 1946

My commission expires Nov. 16, 1949.

Notary Public.

9-25-46


DRILLING LOG

Mason # 1
 Center of NE $\frac{1}{4}$ SW $\frac{1}{4}$
 Section 11 - 34 South - 2 West
 Sumner County, Kansas

DRILLED FOR: A. F. Carson and Fred U. T. Smith
 DRILLED BY : Pulse-Hershfield Drilling Co, Inc.,

COMMENCED: August 4, 1946
 COMPLETED: September 22, 1946

Surface	72
Red rock	165
Red bed	235
Blue shale	415
Red rock	475
Shale and shells	520
Sandy & Shells	680
Shale and shells	980
Sand & shells	1010
Sandy shale & shells	1180
Shale and shells	1285
Red rock and shells	1350
Shale and shells	1610
Cyp	1700
Shale and shells	2262
Lime	2330
Shale and shells	2407
Lime	2530
Shale	2560
Lime	2600
Shale and shells	2775
Sandy shale	2895
Shale	3005
Sandy lime	3012
Shale and shells	3065
Sandy Lime	3087
Sand	3105
Shale	3410
Sand	3448
Lime	3610
Sandy Lime	3650
Shale and shells	3800
Lime	3830
Shale and shells	3978
Sandy shale	4000
Shale	4025
Shale and shells	4043
Shale with chert	4050
Chert	4051
Shale	4074
Shale with chert	4090
Chert	4107
Shale	4125
Chert	4153
Sandy shale	4207
Brown lime and chert	4241
Sandy lime	4262
Black chert and lime	4304
Brown lime - shale breaks	4350
Sandy shale	4377
Chert and lime	4422
Sandy lime	4490

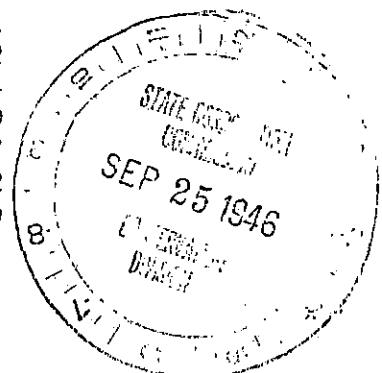

Shale	4522
Chert	4524
Sand	4525
Chert	4542
Sand	4605
Sandy shale	4635
Sand	4641
Lime (Arbuckle)	4695 T. D.
	D & A

CASING RECORD

244' - 10 3/4" cemented - 200 sacks

SEP 25 1946
 11:10 AM
 11:10 AM

11 34 24)
 73 18

1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000

1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000
 1100 1 1000000