

15-129-19001-0000

STATE OF KANSAS
CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Morton County, Sec. 10 Twp. 35 Rge. 33 (E) 42 (W)

Location as "NE/CNWxSWx" or footage from lines: C. SE SE NW

Lease Owner Cities Service Petroleum Company

Lease Name Wacker "B" Well No. 2

Office Address Box 1147, Liberal, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 3-19 1957

Application for plugging filed 10-19 1961

Application for plugging approved 10-23 1961


Plugging commenced 10-17 1961

Plugging completed 12-22 1961

Reason for abandonment of well or producing formation Encroachment of salt water broke in.

If a producing well is abandoned, date of last production September 1961

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

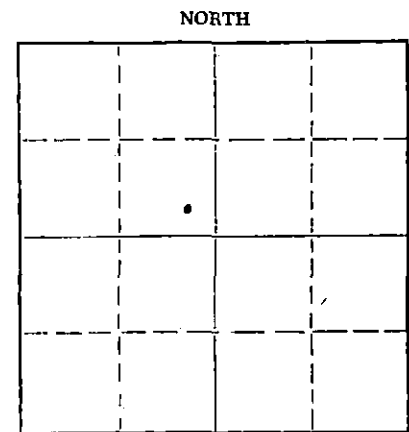

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Lackamp, Jr.

Producing formation Morrow Depth to top 4858 Bottom 4868 Total Depth of Well 5085 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Gas & Salt Wtr	4858	4868	8-5/8	1368	None
Oswego	Salt Water	4189	4208	5-1/2	5084	2001'
Marmaton	Salt Water	3711	3719			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 3500'-3688' 100 sx. cement squeezed
- 1970'-3500' Heavy mud
- 1885'-1970' 25 sx. cement
- 669'-1885' Heavy mud
- 594'-669' 25 sx. cement
- 30'-594' Heavy mud
- 0'-30' 10 sx. cement

RECEIVED
STATE CORPORATION COMMISSION

JAN 4 1962

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco Lease & Well Service

Address 1700 South Main, Borger, Texas

STATE OF Kansas, COUNTY OF Seward, ss.

I, W. J. Devaney (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. J. Devaney

Box 1147, Liberal, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of December, 1961

My commission expires 5-23-65

J. T. Mabrey
J. T. Mabrey Notary Public.

