

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21887-00-00
Spot: S2NWNENW Sec/Twnshp/Rge: 28-34S-31W
505 feet from N Section Line, 1650 feet from W Section Line
Lease/Unit Name: MAX Well Number: 1-28
County: SEWARD Total Vertical Depth: 6450 feet

Operator License No.: 30604
Op Name: RAYDON EXPLORATION, INC.
Address: 9400 N. BROADWAY #400
OKLAHOMA CITY, OK 73114

Conductor Pipe Size: 20 feet: 40 6 SX GROUT
Production Casing Size: 4.5 feet: 5283 WITH 50 SX CMT
Surface Casing Size: 8.625 feet: 1665 WITH 515 SX CMT

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 03/20/2003 1:30 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 400# HULLS & 25 SX CMT. DISPLACE WITH MUD. PLUG AT 1700' WITH 50 SX CMT. PLUG AT 600' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 03/20/2003 3:30 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:

PERFS AT 5208-5220'. TOC @ 2200' ON 2ND STAGE. PUMP 400# HULLS & 25 SX CMT OVER PERFS. LOAD HOLE WITH MUD. 1ST PLUG AT 1700' WITH 50 SX CMT. 2ND PLUG AT 600' WITH 40 SX CMT. 3RD PLUG AT 40' WITH 10 SX CMT. STAYED FULL.

RECEIVED
MAR 26 2003
KCC WICHITA


Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 2036' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

Signed _____

(TECHNICIAN)

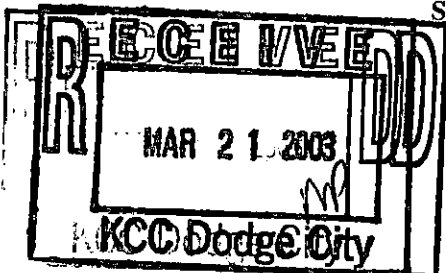

INVOICED

DATE 3-27-03
INV. NO. 2003061346

Form CP 2/3