

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-189-00022-00-00
Spot: SENW Sec/Twnshp/Rge: 26-33S-37W
1980 feet from N Section Line, 1980 feet from W Section Line
Lease/Unit Name: CARPENTER Well Number: 1-26
County: STEVENS Total Vertical Depth: 6663 feet

Operator License No.: 32334 Production Casing Size: 5.5 feet: 6229 WITH 150 SX CMT
Op Name: CHESAPEAKE OPERATING, INC. Surface Casing Size: 8.625 feet: 2862 WITH 1065 SX CMT
Address: PO BOX 18496 6200 N WESTERN AVE.
OKLAHOMA CITY, OK 73154

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 08/14/2003 1:00 PM
Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY
Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: SET CIBP @ 6100' WITH 2 SX CMT. SET CIBP @ 2400' WITH 2 SX CMT. TEST CASING. PERFORATE AT 1700'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: KEVIN STRUBE Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 08/14/2003 4:30 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 6180'. PERFS AT 6142-6156'. SET 1ST CIBP @ 6109' WITH 2 SX CMT ON TOP. FL AT 1860'. SET 2ND CIBP @ 1880'. LOAD 5 1/2" CASING & TEST TO 500 PSIG. PERFORATE AT 1870'. PUMP 2 BBL WATER DOWN 5 1/2". PRESSURED TO 1000 PSIG & LOCKED UP. LOAD ANNULUS WITH 56 BBL FLUID. ESTABLISH CIRCULATION. RIG UP TO 5 1/2" AGAIN, ESTABLISH CIRCULATION. PUMP 400 SX CMT TO FILL 5 1/2" & 5 1/2" X 8 5/8" ANNULUS FROM 1870' TO SURFACE.

RECEIVED
AUG 25 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

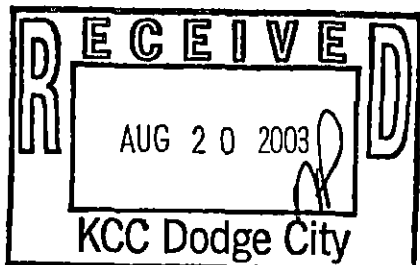

Signed

Jim Holland PARTIAL
(TECHNICIAN)

INVOICED
DATE 9-2-03
INV. NO. 2004060440

Form CP 3/3