


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Seward County, Sec. 1 Twp. 33S Rge. (E) 34 (W)

Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner Pickrell Drilling Company
Lease Name Lee "C" Well No. 1
Office Address 705 4th National Bank Bldg., Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 16, 1968
Application for plugging filed June 16, 1968
Application for plugging approved June 16, 1968
Plugging commenced June 16, 1968
Plugging completed June 16, 1968
Reason for abandonment of well or producing formation Dry Hole

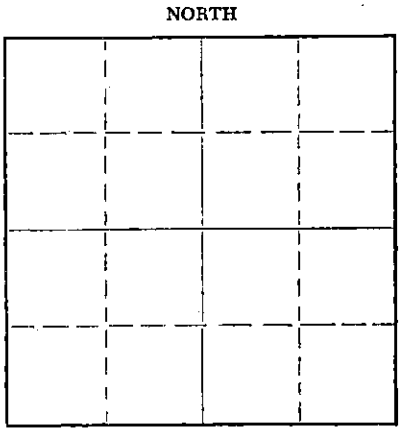

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves, Sublette, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4417 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1630'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy mud to 900'. Set plug. Cemented with 35 sacks cement. Heavy mud to 45'. Set plug. Cemented with 15 sacks cement to bottom of cellar. Plugged rat hole with 2 sacks cement.




Name of Plugging Contractor Pickrell Drilling Company
Address 705 4th National Bank Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDWICK, ss. C. W. SEBITS (employee of owner) or (owner or operator) of the above-described well, being duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebits
705 4th National Bank Building, Wichita 2, Ks.
(Address)

To before me this 24th day of June, 1968
L. M. Whiting
L. M. Whiting Notary Public



My commission expires May 10, 1970

ROTARY DRILLING LOG

COMPANY: PICKRELL DRILLING COMPANY
705 4th National Bank Bldg.
Wichita, Kansas

Rotary Drilling Commenced 6/8/68
Rotary Drilling Completed 6/16/68

LOCATION: Lee "C" No. 1, C SW NE Section 1-33S-34W, Seward County, Kansas.

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: (41 jts) 8 5/8" surface casing set at 1630', cemented with 625 sacks cement. Circulated. Completed 5:45 PM June 6, 1968. No oil string run. D & A plugged 6/16/68.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

1120	Sandy Shale & Anhydrite	<u>C. F. S.</u>
1310	Sand	
1405	Shale & Lime	4115
1625	Shale & Sand	4140
1665	Anhydrite	4295
1900	Red Beds	4310
2250	Shale & R.B.	4417
2360	Shale & Lime	
2668	Lime	
2750	Sand & Shale	<u>Slope Tests</u>
3840	Lime & Shale	2000
4115	Lime	2500
4220	Lime & Shale	3000
4295	Lime	3500
4324	Shale	4000
4411	Shale & Lime	
4417	Lime - RTD	

S. L. M.

Pipe Strap 4120.61
Board 4120.88

No Corr.


RECEIVED
STATE CORPORATION COMMISSION
JUN 27 1968
CONSERVATION DIVISION
Wichita, Kansas

The undersigned, C. W. SEBITS, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By [Signature]
C. W. SEBITS Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

24th day of June, 1968, before me the undersigned, a Notary Public, in and for



the aforesaid, personally appeared C. W. SEBITS, to me known to be the Attorney-in-Fact of the PICKRELL DRILLING COMPANY, who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact, and he acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

I have under my hand and seal of office the day and year last above written.

[Signature]
L. M. Whiting, Notary Public

My commission expires: May 10, 1970