

STATE OF KANSAS
STATE CORPORATION COMMISSION
130 S. Market, Room 2078
Wichita, KS 67202

WELL PLUGGING RECORD
K.A.R.-62-3-117

API NUMBER 15-175-20527-00-00

LEASE NAME Big E

WELL NUMBER 1-16

825 Ft. from S Section Line

660 Ft. from E Section Line

SEC. 16 TWP. 34 RGE. 32 (S or W)

COUNTY Seward

Date Well Completed _____

Plugging Commenced 9-10-02

Plugging Completed 9-12-02

RECEIVED
KANSAS CORP COMM

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Quinque Operating Co

ADDRESS P O Box 2738 Liberal KS 67905-2738

PHONE (620) 624 2578 OPERATORS LICENSE NO. 5225

Character of Well Gas/oil

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 9-10-02 (date)

by Scott Alberg (KCC District Agent's Name).

Is ACO-1 filed? Yes If not, Is well log attached? _____

Producing Formation Morrow Depth to Top 5834 Bottom 5830 T.D. 6545

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8 5/8	1532	—
				4 1/2	6035	2648

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from _____ feet to _____ feet each section.
Mixed 1 SK hulls & 20 SK Cmt to plug perfs 5830 to 5630. Shot 4 1/2 @ 2728
Mixed 50 SK out shot hole from 2728 to 2550. Rec. 2648 Pull to 1550. Circ. hole
W/mud 50 SK 1550 to 1400 30 SK 500 to 400 10 SK 40 to 0 Cut off & capped
8 5/8 3 ft. below G.L.

Name of Plugging Contractor SARGENT AND HORTON PLUGGING, INC. License No. 31151

Address Route 1, Box 49BA Tyrone, OK 73951-9731 (580) 854-6515

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Quinque Operating Company

STATE OF Kansas COUNTY OF Seward, ss.

Michael Moore, President (Employee of Operator or (Operator)
above-described well, being first duly sworn on oath, says: That I have knowledge of the fact statements, and matters herein contained and the log of the above-described well as filed in the same are true and correct, so help me God.

(Signature) [Signature]

Michael Moore, President
(Address) P O Box 2738 Liberal, KS 67905-2738



SWORN TO before me this 2 day of October, 2002

Beverly A Stahl
Notary Public

My Commission Expires: _____

MEAD LBR DO-IT CENTER LID
 PO BOX 1176(316-624-3884)
 131 SOUTH KANSAS AVENUE
 LIBERAL, KS 67901



SOLD TO

SHIP TO


QUINQUE OPERATING CO
 P.O. BOX 2738

WELL BIG E 1-16

LIBERAL, KS 67901

ACCOUNT #	CUSTOMER P.O. #	TERMS	ORDER #	ORDER DATE	SLSMN	INVOICE #	INVOICE DATE
00200	BIG E1-16	NET 10TH	53707	09/10/02	JLW	69057	09/10/02
ORDERED	BACK ORDERED	SHIPPED	U/M	DESCRIPTION	PRICE	AMOUNT	

140	0	140	EA	PORTLAND CEMENT 94# PC [8403 GO SOUTH ON COUNTY RD JUST PAST ELEVATOR IN HAYNE FOR 1/4 MI. THAT WILL GO TO AN INTERSECTION CON. SOUTH FOR 8/10 MI. PAST INTERSECTION THEN TURN WEST AT TWO STORY GRAY HOUSE AND FOLLOW ROAD TO WELL.	7.590	1076.60*	
-----	---	-----	----	--	-------	----------	--

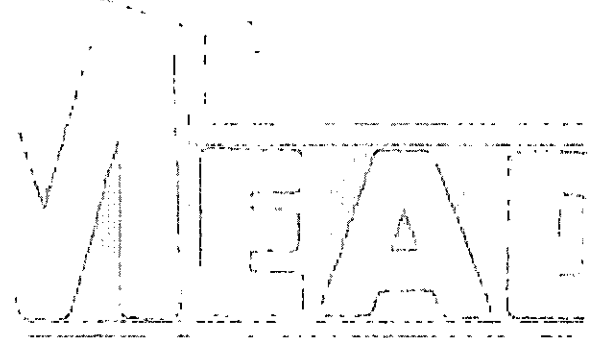

SEP 10, 2002 14:19:51	OT: JLW	FILLED BY 0/1	CHKD BY JLW	DRIVER	MERCHANDISE	1076.60
SHIP VIA					OTHER	0.00
***** * INVOICE * ***** SIGNATURE: <i>Ken Houlton</i>					TAX	7.300% 78.59*
PAGE 1 OF 1 ALL ACCOUNTS DUE AND PAYABLE THE 10 TH OF THE MONTH FOLLOWING DATE OF PURCHASE. FINANCE CHARGE COMPUTED AT 1 1/2% PER MONTH (15% PER YEAR) ON REMAINING BALANCES. (\$1.00 MINIMUM) THIS MAY BE CHANGED TO COMPLY WITH APPLICABLE STATE LAW. I AGREE TO ABOVE TERMS AND CERTIFY MATERIALS LISTED ON THIS TICKET WERE USED AT THE JOB/JOB SITE LISTED ABOVE.					FREIGHT	0.00
					TOTAL	1155.19

Many building products contain substances which may pose health risks to people and animals. Products such as interior paneling, fiberboard and particle board contains formaldehyde which may release vapors causing irritation to the eyes and upper respiratory system. Such vapors can affect people in varying degrees depending on the particular sensitivity. Products such as treated lumber contain chemicals which may also adversely affect the health of people or animals that are in frequent or prolonged contact with the product. Caution should be used in the handling and/or use of any building materials which have been chemically treated or which contain formaldehyde.

Material safety data sheets and consumer information sheets, if any, are available upon request for the goods described herein.