

R

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Sumner County, Sec. 15 Twp. 30 Rge. 1 (E) x (W)

Location as "NE/CNWxSWx" or footage from lines NW SE NE

Lease Owner Petroleum Management Inc.

Lease Name Chitwood Well No. #4

Office Address Box 922 Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 4-20-71 19

Application for plugging approved 19


Plugging commenced 4-26-71 19

Plugging completed 4-29-71 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced?

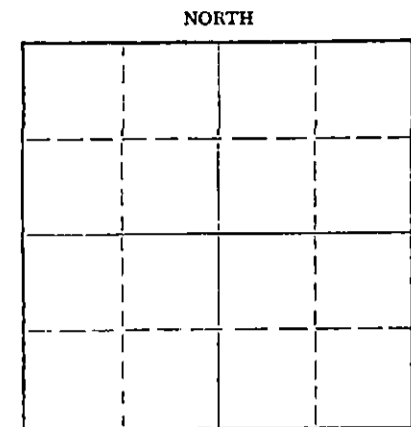

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Howard Hess

Producing formation Depth to top Bottom Total Depth of Well 3887' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3883'	2559.47'
				10 3/4"	286'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3500'. Mixed and dumped 5 sacks cement thru dump bailer.

Bailed hole down to 315', set 15' rock bridge. Filled hole with 6 yards ready mix to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
MAY 4 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364, Great Bend, Kansas


STATE OF Kansas, COUNTY OF Barton, ss.

Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. D. Spencer Sec.

Box 364, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 3 day of May, 1971



Sydney D. Miller Notary Public.

My commission expires October 1972

Thomas E. Sullivan - Chitwood well No. 4

NW SE NE Sec. 15-30-10 Sumner County, Kansas.

Total Depth Rotary 3887'
 Drilling Comm. 4-30-52
 Drilling Comp. 5-21-52
 Contractor: H. L. Williams

Elevation 1247 ft
 Casing:
 10 3/4" OD 286' 285 ft Cement
 5 1/2" OD 3883' 150 ft Cement

Figures indicate Bottom of Formations.

Sand & Clay	45
Shale & Shells	195
Shale & Lime Shells	240
Anhydrite	295
Shale & Shells	610
Lime & Shale	750
Shale & Shells	900
Lime	925
Shale	955
Lime & Shale	995
Shale	1580
Shale & Shells	1765
Shale & Lime	2085
Shale & Shells	2175
Lime & Shale	2275
Shale	2395
Lime & Shale	2420
Shale	2425
Lime & Shale	2570
Shale	2595
Sand	2660
Shale	2345
Lime	3030
Shale & Lime	3060
Lime	3092
Shale	3105
Lime	3156
Shale	3202
Lime & Shale	3245
Lime	3260
Lime & Shale	3400
Shale & Shells	3438
Shale	3459
Lime, Mississippi	3685
Lime & Shale	3720
Lime	3749
Shale	3779
Lime	3783
Shale & Shells	3791
Lime	3850
Shale	3882 Top Simpson Sand 3882
Sand	3887

Total Depth, Rotary 3887

RECEIVED
 STATE CORPORATION COMMISSION
 APR 21 1971
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS.

This is to certify that this is a true and correct copy of the drillers log of the above well.

Subscribed and sworn to before me, a Notary Public, this 23rd day of May, 1952.

My commission expires:
 Feb. 2, 1953.

H. L. Williams

 Notary Public.