

SP


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH



Locate well correctly on above
Section Plat

County. Sec. 15 Twp. 30 Rge. 1 W(E) x(W)
Location as "NE/CNWxSWx" or footage from lines. SE SW SE
Lease Owner Petroleum Management Inc.
Lease Name Snyder Well No. #2
Office Address 1515 Wichita Plaza Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5-21-69 _____ 19____
Plugging completed 5-26-69 _____ 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Howard Hess
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3874' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2	3871'	2353.43'
				8 5/8"	304'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3850'. Mixed and ran 5 sacks cement thru dump bailer.
Mudded hole to 300', set 25' rock bridge. Plugged hole with 4 yards ready-mix to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUN 3 1969
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2 day of June, 19 69

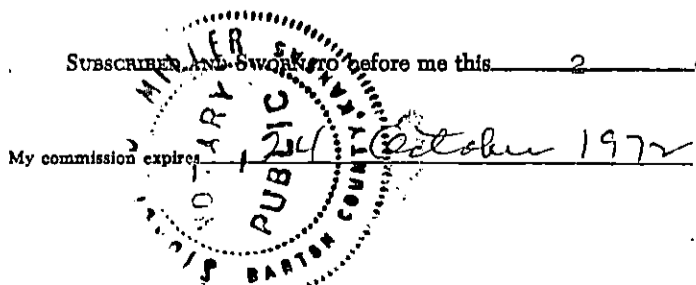

My commission expires _____
Sidney D. Miller
Notary Public.

Sullivan Est. Et Al
Snyder Well # 2
Total Depth 3874' (Rotary)
Drilling comm. 3-3-49
Drilling comp. 3-29-49
Drilling Contractor H. M. Williams

Sec. 15 T. 30 S R. 1 W
SE SW SE
330' from S Line
30' from E Line
Summer County, Kansas.
Production
Elevation 1254
304' (280 sk cement)
3871' (150 " ")

CASING 8 5/8
" 5 1/2

FIGURES INDICATE BOTTOM OF FORMATIONS

Soil & shale	80	
shale & shells	315	
lime	530	
shale & redbed	680	
shale & lime	1365	
shale & lime shells	1545	
shale & lime	1885	
lime	2065	
sticky green shale	2095	
lime	2227	
shale & lime	2300	
shale	2338	
lime & shale	2447	
shale	2494	
lime & shale	2610	Top Stalnaker Sand 2610
sand	2650	
sandy shale & shale	2658	
shale	2680	
lime & shale	2870	
hard lime shell	2875	Top Kansas City Lime 2871
lime	2972	
lime broken	3019	
lime	3167	circulate 3042 - 3047
lime & shale	3474	Top Mississippi Lime 3469
lime	3843	circulate at 3474
shale	3870	lost circulation 3691 & 93
sand	3874	Top Chat. shale 3843 Top Simpson Sand 3870
Total Depth (Rotary)	3874	

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1969
CONSERVATION DIVISION
Wichita, Kansas