


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

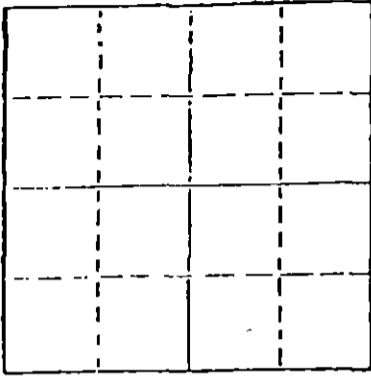

Locate well correctly on above Section Plat

County. Sec. 13 Twp. 30s Rge. 14 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines E/2 SW NW
Lease Owner Raymond Oil Co.
Lease Name Forney Well No. "B" 4
Office Address 200 West Douglas Wichita Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole) Oil Well
Date Well completed 2-22-58 19
Application for plugging filed _____ 19
Application for plugging approved _____ 19
Plugging commenced 5-7-79 19
Plugging completed 5-11-79 19
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Carl Barnett
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3869'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	216'	none
				5 1/2"	3856"	2411'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded Bottom of hole to 3850' Set 5 sks. cement with bailer
Recovered 2411' of casing set rock bridge at 225' dumped 4 yds. ready mix to base of celler

(If additional description is necessary, use BACK of _____)

Name of Plugging Contractor Voth Casing Pulling RECEIVED STATE CORPORATION COMMISSION JUN - 4 1979

STATE OF Kansas COUNTY OF Cowley CONSERVATION DIVISION
Walter Voth (employee of owner, operator or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter Voth
715 South A Arkansas City Ks. 67005
(Address)

My Commission Expires _____ SWORN TO before me this 1 day of June, 1979



Gwonne M. Duncan
Notary Public.

15-191-10168-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

Company- RICHMOND & REIGLE
Farm- Forney "B" No. 4

SEC. 13 T. 30 R. 1W
E2 SW NW

Total Depth. 3869'
Comm. 11-6-57 Comp. 11-19-57
Shot or Treated.
Contractor. Beardmore Drilling Company
Issued. 2-22-58

County Sumner
KANSAS



CASING:
8 5/8" 216' cem w/140 sx
5 1/2" 3856' cem w/50, sx

Elevation. 1234' KB

Production. 25 BOPD

Figures indicate Bottom of Formations.

cellar	5
sand	40
shale & shells	216
shells & lime	280
shale & lime	2572
sand	2620
shale & lime	2815
lime	2965
lime & shale	2415
lime	3530
lime & shale	3570
lime	3605
lime & shale	3685
lime	3715
lime & shale	3755
lime	3795
shale & lime	3846
Rotary Total Depth	3869
Total Depth	

TOPS:

Stalnaker	2490
Kansas City	2819
Base Kansas City	3046
Mississippi	3417
Kinderhook	3804
Simpson Shale	3856 1/2

CORE #1 3846-3863 Recovered 17'

White sand 1 ft. lt. brown sand 1 ft.
oil saturated brown & white sand 1 ft.
sl. saturated white sand 1 ft. white
sand 1 ft. Total Depth 3869, Plugged
Back 2' Calseal Total completed 3867
No water in hole before frac. Well
swabbed on 6 hr. test 4 bbls. oil 10
bbl. water per hour after recovering
bait.

RECEIVED
STATE CORPORATION COMMISSION

APR 30 1979

CONSERVATION DIVISION
Wichita, Kansas