

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Sumner County. Sec. 7 Twp. 34S Rge. (E) 3 (W)

Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner Appleton Oil Company
Lease Name Jerry Lebeda Well No. 1
Office Address 506 Beacon Building, Tulsa, Oklahoma 74103
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Sept. 2, 1968
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced Sept. 2, 1968
Plugging completed Sept. 2, 1968
Reason for abandonment of well or producing formation Dry Hole

NORTH

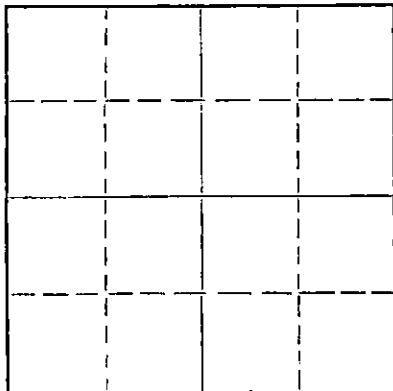Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Ted Dewey of Augusta, Ks.)

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 4755 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	269'	8-5/8"	8/22/68	-----
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 280 Feet;
1/2 sax Hulls, Plug and 25 sax Cement
thru the Drill Pipe; Mud to 35 Feet;
1/2 sax Hulls, Plug and 8 sax Cement to
Base of Cellar. 2 sax Cement in Rat Hole.
Job completed at 12:45 P.M. on 9/2/68.

RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sage Drilling Co.
Address 500 Bitting Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.


Wayne W. Kahmeyer of Sage Drilling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne W. Kahmeyer
500 Bitting Building, Wichita, Kansas
(Address)

Subscribed and sworn to before me this 5th day of September, 1968

Commission expires November 26, 1970.

Louise K. Whitted - Notary Public.



DRILLERS LOGJERRY LEBEDA NO. 1

CASING RECORD:	OPERATOR: Appleton Oil Company	DESCRIPTION:
8-5/8" @ 269'	CONTRACTOR: Sage Drilling Co.	SW SW SW
w/200 sax Cement	COMMENCED: August 22, 1968	Sec. 7-34S-3W
TOTAL DEPTH:	COMPLETED: September 2, 1968	Sumner County, Kansas
4755'		

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Red Bed	0	655	
Lime & Shale	655	2090	
Shale & Lime	2090	2478	
Lime & Shale	2478	2604	
Shale & Lime	2604	3188	
Shale, Sand & Lime	3188	3362	
Lime & Shale	3362	3575	
Lime	3575	3605	
Lime & Shale	3605	3805	
Shale & Lime	3805	3876	
Lime & Shale	3876	4093	
Shale & Lime	4093	4250	
Lime, Shale & Chert	4250	4302	
Chert & Lime	4302	4338	
Shale & Chert	4338	4386	
Chert, Lime & Shale	4386	4468	
Lime, Shale & Chert	4468	4606	
Lime	4606	4657	
Shale & Lime	4657	4755	D&A


RECEIVED
STATE CORPORATION COMMISSION
SEP 6 1968
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Wayne W. Kahmeyer
Wayne W. Kahmeyer

Subscribed and sworn to before me this 5th day of September, 1968.



Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1970.