


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

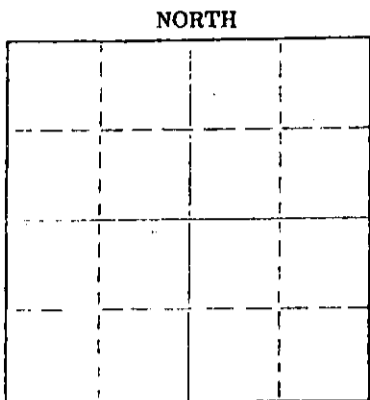

Locate well correctly on above Section Plat

Location as "NE/CNW/SE/SW" or footage from lines summer County. Sec. 22 Twp. 34 Rge. 3 (E) (W)  
Lease Owner Frank Groves  
Lease Name Hudson #2 Well No. \_\_\_\_\_  
Office Address Arkansas City, Kansas 67005  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced 7/2/75 \_\_\_\_\_ 19\_\_\_\_  
Plugging completed 7/8/75 \_\_\_\_\_ 19\_\_\_\_  
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Dewey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4747 feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	664	none
				5 1/2"	4741	728

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded hole to 4720' and set 5 sacks cement. Shot pipe at 926', 829', 733', pulled pipe. Set rock bridge 255 to 240' and dumped 4 yards ready mix.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor VOTH CASING PULLING  
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss. WALTER VOTH (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter Voth  
CHASE, KANSAS

SUBSCRIBED AND SWORN TO before me this 14th day of July, 1975

Margaret Melcher  
Notary Public.

My commission expires \_\_\_\_\_



RECEIVED  
STATE CORPORATION COMMISSION

JUL 17 1975

CONSERVATION DIVISION  
Wichita, Kansas

15-191-01027-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

508 East Murdock,


Wichita, Kansas

Company- HERNDON DRILLING CO.  
Farm- Hudson No. 2

SEC. 22 T. 34 R. 3W  
NW SE NW

Total Depth, 4747'  
Comm. 1-24-58 Comp. 2-14-58  
Shot or Treated.  
Contractor, Herndon Drlg.  
Issued, 4-26-58

County Sumner  
KANSAS



Elevation, 1201' DF

Production, 351 BOPD

Figures indicate Bottom of Formations.

surface hole	315
shale & shells	500
shale, lime & shells	664
lime & shale	2840
lime	2900
lime & shale	3290
lime	3345
lime & shale	3460
lime, sand & shale	3530
lime	3670
lime & shale	3760
lime	4060
lime & shale	4305
lime	4366
chert & lime	4403
lime	4600
lime & shale	4708
shale	4742
sand	4747
Total Depth	

TOPS:	
Mississippi	4295
Viola	4734
Simpson	4740

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 1 1975  
CONSERVATION DIVISION  
Wichita, Kansas