

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-20375-00-00
Spot: CSENE Sec/Twnshp/Rge: 29-33S-34W
1980 feet from N Section Line, 660 feet from E Section Line
Lease/Unit Name: FINCHAM A Well Number: 4
County: SEWARD Total Vertical Depth: 6350 feet

Operator License No.: 4549
Op Name: ANADARKO PETROLEUM CORPORATI
Address: 1201 LAKE ROBBINS DRIVE
THE WOODLANDS, TX 77380

Production Casing Size: 5.5 feet: 3628 WITH 150 SX CMT
Surface Casing Size: 8.625 feet: 1689 CIRCULATED
\$206.38

Well Type: OIL UIC Docket No: Date/Time to Plug: 02/28/2003 2:00 PM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 400# HULLS WITH 25 SX CMT FOR BOTTOM PLUG. 50 SX CMT AT 1680'. 40 SX CMT AT 600'. 10 SX CMT AT 40'.

Plugging Proposal Received By: KEVIN STRUBE Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 03/03/2003 12:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:

PBTD 6286'. PERFS AT 6235-54'. 02/28/03: PUMP 400# HULLS WITH 25 SX CMT TO PLUG BOTTOM. DISPLACE WITH 135 BBL MUD. PRESSURE TO 500 PSIG. 1ST PLUG PULL OUT OF HOLE WITH 5 1/2" TO 1680'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE WITH CASING TO 600'. SDON. 03/03/03: LOAD HOLE WITH MUD & PUMP 40 SX CMT AT 600'. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE & PUMP 10 SX CMT TO SURFACE.


RECEIVED

MAR 10 2003
3-10-03
WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1720' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

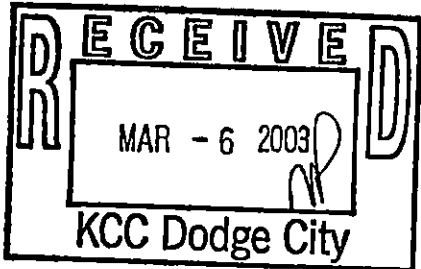

Signed Jim Holland PARTA
(TECHNICIAN)

INVOICED
DATE 3-10-03
INV. NO. 2003061290

Form OR 2/3