

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-175-20453-00-00  
Spot: CNENE Sec/Twnshp/Rge: 22-33S-34W  
660 feet from N Section Line, 660 feet from E Section Line  
Lease/Unit Name: COSGROVE Well Number: A-3  
County: SEWARD Total Vertical Depth: 6360 feet

Operator License No.: 4549 Production Casing Size: 4.5 feet: 6357 WITH 350 SX CMT  
Op Name: ANADARKO PETROLEUM CORPORATI Surface Casing Size: 8.625 feet: 1679 WITH 800 SX CMT  
Address: 1201 LAKE ROBBINS DRIVE  
THE WOODLANDS, TX 77380

206-70

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/24/2003 1:00 PM  
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.  
Proposal Rcvd. from: JOHN Company: SARGENT & HORTON Phone: (580) 854-6515

Proposed Plugging Method: PUMP 200# HULLS & 20 SX CMT ON BOTTOM. PLUG AT 1700' WITH 50 SX CMT. PLUG AT 700' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 04/25/2003 10:00 AM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 6100'. PERFS AT 6306-28, CIBP @ 6250', 6182-90, CIBP @ 6100'. OPEN PERFS 5900-10 & 5873-80'. BLEW WELL DOWN, WOULDN'T DIE, PUMPED AGAINST PRESSURE. PUMP 200# HULLS & 20 SX CMT. DISPLACE WITH MUD & PRESSURE TO 2000 PSIG. 1ST PLUG PULL OUT OF HOLE TO 1720'. LOAD HOLE WITH MUD & PUMP 50 SX CMT. DISPLACE WITH MUD. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE WITH 4 1/2" CASING TO 700'. LOAD HOLE & PUMP 40 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. SDON. 04/25/03: LOAD HOLE & PUMP 10 SX CMT TO SURFACE.

RECEIVED  
MAY 02 2003  
5-02-03  
KCC WICHITA

Remarks: USED COMON CEMENT BY SARGENTS. RECOVERED 1763' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

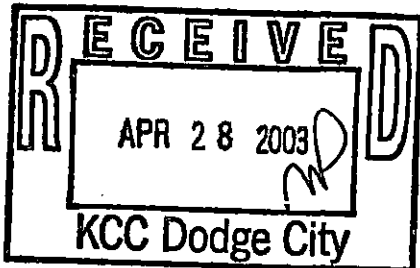

Signed Jim Holland PERT II  
(TECHNICIAN)  
**INVOICED!**

DATE 5-5-03  
WEL. NO. 2003061489

CP 2/3