

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Morton County, Sec. 1 Twp. 33S Rge. 42 (W)

Location as "NE/CNW%SW%" or footage from lines 330'N & 330'W of S 1/4

Lease Owner Cities Service Oil Company

Lease Name Hermann "A" Well No. 1

Office Address Box 1028, Guymon, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 3-25 19 53

Application for plugging filed 2-27 19 64

Application for plugging approved 2-28 19 64


Plugging commenced 3-1 19 64

Plugging completed 3-1 19 64

Reason for abandonment of well or producing formation Dryhole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

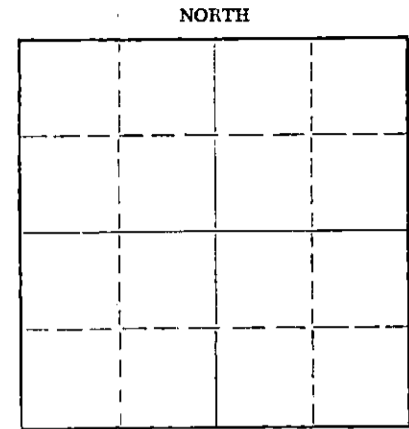

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh E. Scott

Producing formation Topeka Depth to top 2321 Bottom 3143 Total Depth of Well 3560 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Topeka	Gas	2321	3143	8 5/8"	325	None
	(Now Dry)			5 1/2"	3200	1009'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spotted 20 sacks common cement at 2875'; shot casing at 1528', 1362', 1137' and 1022', pulled 1009' 5 1/2" casing. Spotted 35 sacks common from 45' to 5' of surface at which point the 8 5/8" casing was cut off and a steel cap welded on.

RECEIVED
STATE CORPORATION COMMISSION

MAR 9 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Daco Lease & Well Service
Address Borger, Texas

STATE OF Oklahoma, COUNTY OF Texas, ss.
I, H. E. Massey (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Massey H. E. Massey
Dist. Supt. Box 1028, Guymon, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of March, 19 64

Gloyd L. Shockley Gloyd L. Shockley
Notary Public.

My commission expires 5-4-66

