


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County, Sec. 10 Twp. 34 Rge. 31 E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
C SE NE

Lease Owner Yucca Petroleum Co.
Lease Name Platt Well No. 1
Office Address Box 2585, Amarillo, Texas 79105
Character of Well (Completed as Oil, Gas or Dry Hole) Gas

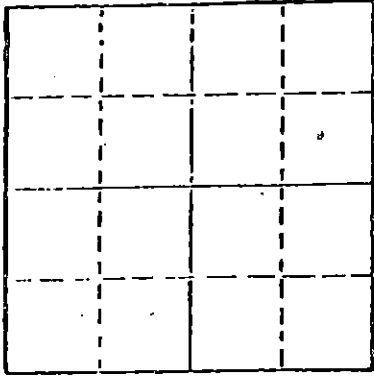

Date Well completed 1-28- 19 78
Application for plugging filed 1-7 19 78
Application for plugging approved 1-9 19 78
Plugging commenced 1-28 19 78
Plugging completed 2-4 19 78

Reason for abandonment of well or producing formation Non Commercial value
If a producing well is abandoned, date of last production June 1976

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Massey
Producing formation Chester Depth to top 5670' Bottom 5694' Total Depth of Well 5880'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0'	1471'	8 5/8"	1471'	0'
Production		0'	5879'	2 7/8"	5879'	2854'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 1 sack of bulls & 5 sacks cement to 5480' Pressured to 750 lbs.
Displaced w/ Mud to 1400'
Spotted 20 sacks cement 1400' to 1330'
Displaced w/ mud 1330' to 900'
Spotted 20 sacks cement 900' to 830'
Displaced w/ mud 830' to 40'
Put bridge & 10 sacks cement 40' to 0'
Cut off 8 5/8" 42" below ground level.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Midwest Casing Pulling
Box F, Sublette, Kansas 67877 Kans. Permit # 766

STATE OF KANSAS COUNTY OF Haskell, ss.
I Edgar J. Eves (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edgar J. Eves
Box F, Sublette, Kansas 67877
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of February, 1978

Sandra L. Eves
Notary Public.

My commission expires 12-6-80

