

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Seward County, Sec. 31 Twp. 34S Rge. 34 (E) (W) X

Location as "NE/CNW/SE" or footage from lines C SW SE
Lease Owner MALLONEE-MAHONEY, INC.

Lease Name Dowdy Well No. 1-31
Office Address Box 1507, LIBERAL, KS.

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed 9-8-1970

Application for plugging filed 10-22-1975

Application for plugging approved 10-23-1975

Plugging commenced 11-4-1975


Plugging completed 11-6-1975

Reason for abandonment of well or producing formation

WELL DEPLETED

If a producing well is abandoned, date of last production 3-3-1975

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

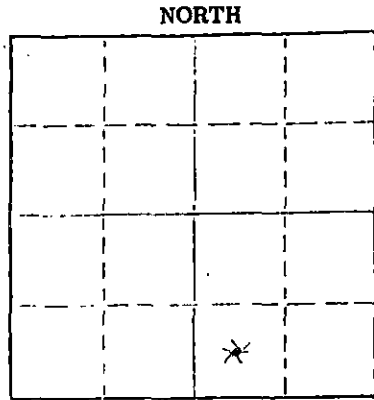

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Clarence Thomas

Producing formation KEYES Depth to top 6172' Bottom 6196' Total Depth of Well 6620

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1110	none
				4 1/2	6618	2705

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 2 sks. of hulls & 20 sks. of cement @ 6226 to 6050
Pumped 35 sks. of cement @ 1190 to 1390
Put 15 sks. of cement @ 45 to 0

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sargent's Casing Pulling Service Kansas No. 511

Address Box 506 Liberal, Kansas 67901

STATE OF KANSAS COUNTY OF SEWARD 58.

A. CLIFFT (employee of owner) or (owner or operator) of the above-described

above-described well as filed and that the same are true and correct. So help me God.

(Signature) A. Clifft

Box 1507, LIBERAL, KS. 67901

(Address)

Subscribed and sworn to before me this 11th day of NOVEMBER, 1975

Patricia A. Pennington

PATRICIA A. PENNINGTON


Notary Public.

My commission expires 12/14/75

RECEIVED
STATE CORPORATION COMMISSION

NOV 13 1975

CONSERVATION DIVISION
Wichita, Kansas



OCT 24 1970

Form G

15-175-2011-0000

1-31 Dowdy

31-34-34W
E. SW SE
31-34-34W
Elev. 2953' KB
I.O.F. 1,089,000 CFCPO
Keyes

WELL RECORD



STATE OF KANSAS

DEPARTMENT OF MINES AND METALS
OIL AND GAS DIVISION

Permit No. _____ Oil or Gas Well _____ (21nc)

Company MALLONEY & MALONEY
Address Box 1257, Liberal, Kansas
Furn. DOWDY Acres _____
Location (waters) Section 31-34S-34W
Well No. 1-31 Elev. _____
District _____ County Seward
Drilling Commenced June 12, 1970
Drilling Completed June 23, 1970
Name of Contractor LOHMANN-JOHNSON DRILLING CO., INC.
320 Indiana Bank Bldg., Evansville, Indiana 47708
Date Shot _____ From _____ To _____
With _____
Open flow. /10ths Water in _____ Inch
/10ths Merc. in _____ Inch

Casing and Used in Left In Tubing
Drilling Well
Size _____ Kind of Packer _____
10 _____
13 _____
16 _____
Size of _____
3 1/2" Casing set @ 1440'
5/8" cemented w/ 500 lbs cement
3 _____ Perf. top _____
Perf. bottom _____
Perf. top _____
Perf. bottom _____
Casing Curved _____ Size _____ No. Ft. _____ Date _____
4-1/2" casing @ 6374' 200 ft

Formation	Color	Hard or Soft	Top	Bottom	Oil, Gas & Coal or Water	Depth Found	Remarks
SAND & RED BED			0	1440	<u>Log Taps</u>		
SAND			1440	1470			
RED BED			1470	2533	<u>Wichner</u>		4320
LIME & SHALE			2533	2670	<u>U. Toronto</u>		4342
LIME			2670	3267	<u>J "</u>		4386
SHALE & LIME			3267	3356	<u>J K C</u>		4440
LIME			3356	5393	<u>Marmaton</u>		5198
LIME & SHALE			5393	5835	<u>Cherokee</u>		5520
SHALE			5835	5900	<u>Morrow Sh</u>		5864
LIME & SHALE			5900	6220	<u>Keyes Sd</u>		6168
LIME			6220	6740	<u>Chest</u>		6210
TOTAL DEPTH			6740		<u>" Sd</u>		6474
					<u>St. Louis</u>		6522
					<u>St. Louis</u>		6632

The undersigned, Lohmann-Johnson Drilling Co., Inc., hereby certifies that the above is a true and correct log of the formations encountered in drilling this well in accordance with the Daily Drilling Reports.

LOHMANN-JOHNSON DRILLING CO., INC
By [Signature]
Owner A. Schmitt, Vice-President

Subscribed and sworn to the above this 24th day of September 1970

[Signature]
Helen V. [Name] - Notary Public

My Commission expires: November 3, 1975

RECEIVED
STATE CORPORATION COMMISSION
JAN 20 1976
CONSERVATION DIVISION
Wichita, Kansas