

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Seward County, Sec. 35 Twp. 34S Rge. 31W (E) (W)

Location as "NE/CNW%SW%" or footage from lines

Lease Owner Parlay Oil Inc.

Lease Name Federal Land Bank Well No. 1-35

Office Address P. O. Box 488, Spearman, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 25, 1967 19

Application for plugging filed November 24, 1967 19

Application for plugging approved November 24, 1967 19

Plugging commenced November 24, 1967 19

Plugging completed November 25, 1967 19

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eddie Eves

Producing formation Depth to top Bottom Total Depth of Well 6335 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	1433'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

700' - 600' w/35 sacks Common
Cement Plug @45' to bottom of Cellar
by Dowell

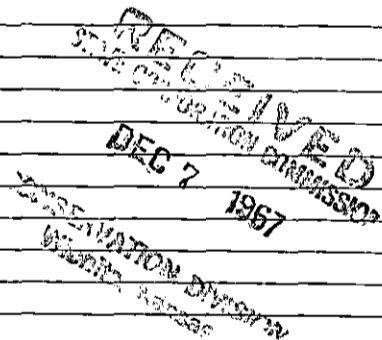

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Zenith Drilling Corporation, Inc.
Address Suite 737 - 300 West Douglas, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
C. Robert Buford (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. Robert Buford
Suite 737 - 300 W. Douglas, Wichita, Kansas (Address)

Subscribed and sworn to before me this 28th day of November, 1967
August 15, 1971.



Myrna D. Murphy Notary Public.

WELL LOG

COMPANY PARLAY OIL INC.

SEC. 35-T34S-R31W

FARM Federal Land Bank NO. 1-35

LOC. SW-SW


TOTAL DEPTH 6335'

COUNTY Seward

COMM. Nov. 12, 1967 COMP. Nov. 25, 1967

CONTRACTOR Zenith Drilling Corporation, Inc.

CASING 8 5/8" @1433', w/guide shoe, insert fillup collar, 2 centralizers & cement basket @175'; cemented w/505 sx. lite wt. 4% gel, 2% CaCl, & 100 sx. Class A 2% CaCl.



ELEVATION 2688.7 GD

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

425'	Surface Sand, Red Bed
1433'	Sand, Clay, Red Bed
1940'	Red Bed, Shale
2620'	Shale, Lime
3545'	Lime, Shale
3778'	Shale, Lime
3985'	Lime, Shale
4501'	Shale, Lime
4770'	Lime, Shale
5795'	Lime
5995'	Lime, Shale, Sand
6235'	Lime, Shale
6335' T.D.	Lime

RECEIVED
STATE CORPORATION COMMISSION

DEC 7 1967

CONSERVATION DIVISION
Topeka, Kansas

State of Kansas }
County of Sedgwick } SS

I, C. Robert Buford, President of Zenith Drilling Corporation, Inc.
upon oath state the above and foregoing is a true and correct copy of the log of the Fed. Land Bk. #1-35 well.

C. Robert Buford

Subscribed and sworn to before me this 28 day of November, 1967.

My Commission Expires: August 15, 1971.

Myrna D. Murphy

NOTARY PUBLIC

Myrna D. Murphy

