


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

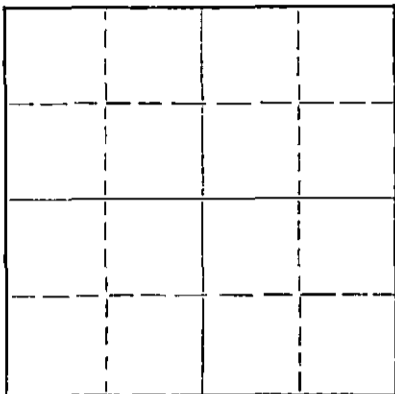

Locate well correctly on above
Section Plat

Meade County, Sec. 5 Twp. 34 Rge. 26 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C NE/4

Lease Owner Tennessee Gas Transmission Co.

Lease Name Martin Ediger #1 Well No.

Office Address Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 19

Application for plugging filed 2-18 19 58

Application for plugging approved 2-19 19 58

Plugging commenced 2-24-58 19

Plugging completed 2-28-58 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Lac Kamp

Producing formation Depth to top Bottom Total Depth of Well 5941' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1400'	none
				5-1/2"	5940'	5561'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked the hole to 5785' and found it open.
Filled w/sand to 5742' and ran 5 sacks of
cement. Pulled 120 jts of casing to 1694'
and circulated pipe with 50 sacks of gel
mud. Pulled rest of casing, cleared hole
and bailed mud to 560', set a 10' rock
bridge and ran 20 sacks of cement. Mudded
the hole to 35', set a rock bridge and ran
10 sacks of cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION

MAR 8 1958

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Co., Inc.

Address Chase, Kansas

STATE OF KANSAS, COUNTY OF RICE, ss.

Paul H. Lenhart

(employee of owner) or (owner of property) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Paul H. Lenhart

(Address)

SUBSCRIBED AND SWORN TO before me this 3rd day of March, 19 58

Thomas U. Duggin

Notary Public.

My commission expires

9-27-58

PLUGGING
SEC 5 T. 34 R. 26
BOOK PAGE 84 LINE 4