

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22109-00-01
Spot: W2NE Sec/Twnshp/Rge: 10-34S-13W
1320 feet from N Section Line, 1680 feet from E Section Line
Lease/Unit Name: DONOVAN Well Number: 1-A
County: BARBER Total Vertical Depth: 4848 feet

Operator License No.: 3080
Op Name: JACK EXPLORATION, INC.
Address: PO BOX 1279 812 W. 11TH STREET
SULPHUR, OK 73086

Production Casing Size: 4.5 feet: 4190 WITH 150 SX CMT
Surface Casing Size: 8.625 feet: 522

#15756

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/27/2003 11:50 AM
Plug Co. License No.: 33062 Plug Co. Name: R & R WELL SERVICE, INC.
Proposal Rcvd. from: ALAN WATSON Company: _____ Phone: (580) 621-3679

Proposed Plugging Method: CIBP @ 4000' WITH 2 SX CMT. PUMP 50 SX CMT AT 550'. PUMP 10 SX CMT AT 0-40'.

Plugging Proposal Received By: SCOTT ALBERG Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/27/2003 1:00 PM KCC Agent: SCOTT ALBERG

Actual Plugging Report:


PERFS AT 4025-4030'. CIBP @ 4000' WITH 2 SX CMT ON TOP. LOAD HOLE WITH 15 SX GEL. SPOT 75 SX CMT AT 525'. SPOT 25 SX CMT AT 0-40'. GOOD CIRCULATION THROUGHOUT JOB.

RECEIVED
OCT 31 2003
KCC WICHITA

Remarks: USED CLASS A CMT W/3% CC BY ALLIED. RECOVERED 1718' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

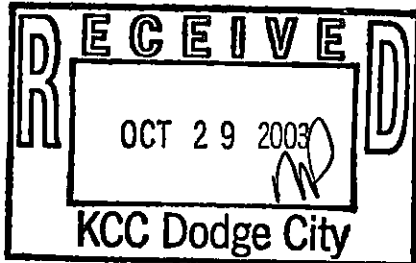

Signed _____

INVOICED (TECHNICIAN)

DATE 10-31-03

INV. NO. 2004060717

Form CP-23