

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-025-20638-00-00
Spot: NWSENW Sec/Twnshp/Rge: 23-34S-21W
1650 feet from N Section Line, 1650 feet from W Section Line
Lease/Unit Name: BARBY Well Number: 6-23
County: CLARK Total Vertical Depth: 4390 feet

Operator License No.: 5055
Op Name: C. H. TODD, INC.
Address: 1000 N. TYLER
WICHITA, KS 67212

Conductor Pipe Size: 20	feet: 75	WITH 275 SX CMT
Conductor Pipe Size: 13.375	feet: 284	WITH 550 SX CMT
Production Casing Size: 5.5	feet: 4376	WITH 150 SX CMT
Surface Casing Size: 8.625	feet: 839	WITH 600 SX CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 09/04/2003 12:15 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND TO 4200' & 5 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - WIPER PLUG - 150 SX CMT.

Plugging Proposal Received By: STEVE MIDDLETON Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 09/04/2003 12:50 PM KCC Agent: STEVE MIDDLETON

Actual Plugging Report:


PBTD 4335'. PERFS AT 4278-4292'. SAND TO 4200' WITH 5 SX CMT ON TOP. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 150 SX CMT. MAXIMUM PRESSURE 700#. SHUT IN PRESSURE 500#.

RECEIVED
SEP 10 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 3200' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

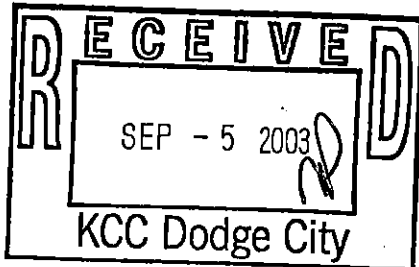

Signed _____

(Signature)
(TECHNICIAN)

INVOICED

DATE 9-10-03

INV. NO. 2004060489

Form CP-1/3