

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-151-20039-00-01
Spot: NESW Sec/Twnshp/Rge: 34-28S-12W
1980 feet from S Section Line, 1980 feet from W Section Line
Lease/Unit Name: GEORGIA - WD Well Number: 1
County: PRATT Total Vertical Depth: 4530 feet

Operator License No.: 30481
Op Name: APOLLO ENERGIES, INC.
Address: 10378 N 281 HWY
PRATT, KS 67124

Production Casing Size: 5.5 feet: 4529 WITH 135 SX CMT
Surface Casing Size: 8.625 feet: 378 WITH 350 SX CMT

A147²³

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/21/2003 12:45 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JIM BYERS Company: APOLLO ENERGIES Phone: (620) 672-9001

Proposed Plugging Method: SAND TO 4190' & 5 SX CMT. PUMP 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 100 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/21/2003 1:30 PM KCC Agent: STEVE PFEIFER

Actual Plugging Report:


PBTD 4529'. PERFS AT 4243-46 & 4502-06'. SANDED BACK TO 4190' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. PUMPED DOWN 8 5/8" WITH 300# HULLS - 10 SX GEL - 50 SX CMT - 10 SX GEL - 100# HULLS - 8 5/8" WIPER PLUG - 100 SX CMT. MAXIMUM PRESSURE 700#. SHUT IN PRESSURE 300#.

RECEIVED
OCT 31 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2680' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

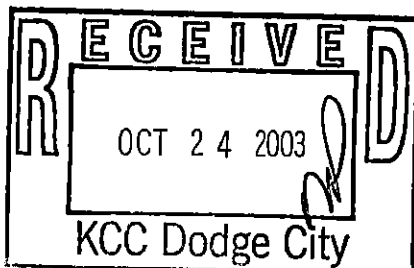

Signed

Stephen J. Pfeifer
(TECHNICIAN)

INVOICED
DATE 10-31-03
INVOICE NO. 2004060712

Form 72-23
[Signature]