

15-129-00048-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Morton County, Sec. 22 Twp. 33 Rge. 42 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 330' N, 330' W of Center
Lease Owner Cities Service Oil Company
Lease Name Hentschel "A" Well No. 2
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-12 19 57
Application for plugging filed 7-12 19 57
Application for plugging approved 7-19 19 57
Plugging commenced 7-20 19 57
Plugging completed 7-22 19 57
Reason for abandonment of well or producing formation Dry Hole

NORTH

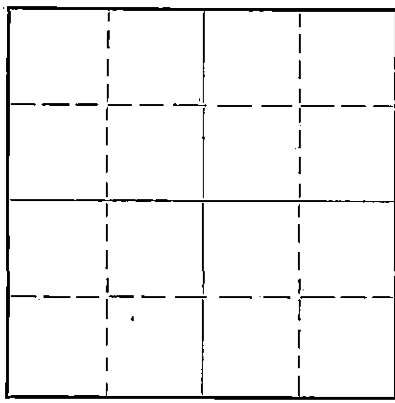

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. J. Phillippe
Producing formation Depth to top Bottom Total Depth of Well 5095 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Anhydrite	Anhydrite	1365	1379	8-5/8" 2 1/2"	1379	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Spot 25 sacks of cement at 4800', 20 sacks at 3300', 25 sacks at 2900', 30 sacks at 1380', heavy rotary mud to 20' of ground level; cement to 4' of surface at which point the 8-5/8" casing was cut off and a steel cap welded on the casing.

RECEIVED
STATE CORPORATION COMMISSION
JUL 23 1957
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to H. V. Anderson
Address Box 70, Liberal, Kansas

STATE OF KANSAS, COUNTY OF SEWARD, ss.
W. J. Devaney (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *W. J. Devaney* W. J. Devaney
Box 70, Liberal, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 22 day of July, 1957

My commission expires 5-23-1961
J. T. Mabrey J. T. Mabrey
Notary Public.

PLUGGING
FILE SEC 22 T. 33 R 42W
BOOK PAGE 28 LINE 7

22-7877-s 449-10M