

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-119-20206-00-00
Spot: NWNWSWSW Sec/Twnshp/Rge: 34-34S-29W
1250 feet from S Section Line, 1250 feet from W Section Line
Lease/Unit Name: ADAMS Well Number: 1-34
County: MEADE Total Vertical Depth: 6310 feet

Operator License No.: 30151
Op Name: EASON DRILLING & SERVICES CO.
Address: TWO WEST SECOND STREET
TULSA, OK 74103

Production Casing Size: 4.5 feet: 6105 WITH 200 SX CMT
Surface Casing Size: 8.625 feet: 1541 WITH 750 SX CMT

\$205.08

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 04/29/2003 10:15 AM
Plug Co. License No.: 32833 Plug Co. Name: SARGENT LILLARD CASING PULLING, INC.
Proposal Rcvd. from: ED PIPPITT Company: EASON DRILLING Phone: (918) 583-1791

Proposed Plugging Method: CIBP @ 5889' WITH 2 SX CMT. PLUG AT 1575' WITH 50 SX CMT. PLUG AT 550' WITH 40 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 04/29/2003 1:15 PM KCC Agent: STEVE MIDDLETON


Actual Plugging Report:
PBTD 6034'. PERFS AT 5928-36'. CIBP SET AT 5889' WITH 2 SX CMT. 1ST PLUG PULL CASING TO 1575'. LOAD HOLE WITH MUD & SPOT 50 SX CMT. 2ND PLUG PULL CASING TO 550' & SPOT 40 SX CMT. 3RD PLUG PULL CASING TO 40' & CIRCULATED 10 SX CMT TO SURFACE. STAYED FULL.

RECEIVED
MAY 13 2003
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENT & LILLARD. RECOVERED 2800' OF 4 1/2" CASING.

Plugged through: CSG

District: 01

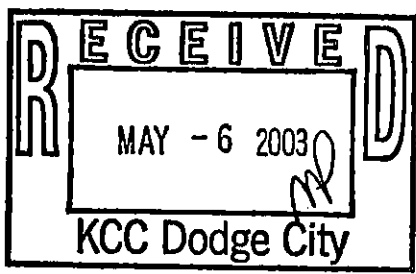

Signed [Signature]
(TECHNICIAN)

INVOICED
DATE 5-14-03
INV. NO. 2003061525