


15-119-00092-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All-Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

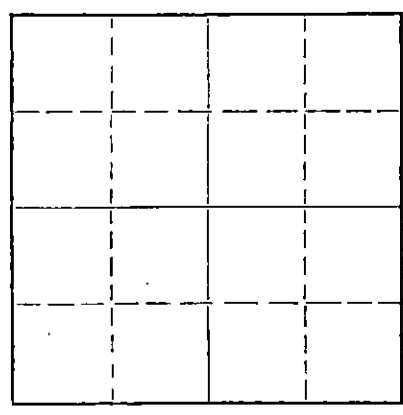

Locate well correctly on above
Section Plat

Meade County, Sec. 27 Twp. 34 Rge. 30W (E) (W)
Location as "NE/CNW*SW*" or footage from lines C/SE SE
Lease Owner Thomas & Brewer
Lease Name Adams "C" Well No. 1
Office Address Box 985, Liberal, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6/7 19 59
Application for plugging filed 6/6 verbally 19 59
Application for plugging approved 6/6 verbally 19 59
Plugging commenced 6/7 19 59
Plugging completed 6/7 19 59
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 6297 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1412'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud up to 700', 1/4 sack hulls, plug #1 & 25 sx cement. Mud up to 300', 1/4 sack hulls, plug #2 & 20 sx cement. Mud up to 35', 1/4 sack hulls, plug #3, plug with wire line & 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUN 12 1959
6-12-59
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF KANSAS, COUNTY OF RUSSELL
Harold Wurst drilling contractor
(employee of ~~owner~~ of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) BENNETT & ROBERTS DRILLING CO. - Contractor
Russell, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of June, 19 59

My commission expires 6/17/62 Notary Public.

PLUGGING
FILE SEC. 27 T. 34 R. 30 W
BOOK PAGE 45 LINE 9

15-119-00092-0000

THOMAS & BREWER
Adams "C" #1

C/SE SE Sec. 27-34-30W
Meade County, Kansas

R.T.D. 6297

CONTRACTOR: Bennett & Roberts Drilling Co.

Commenced 5/15/59
Completed 6/7/59

8 5/8" Set @ 1412' w/700 sx cmt.

Surface Clay & Sand Stks.	75'
Sand	300
Shale	460
Sand	670
Red Bed	825
Shale & Shells	1040
Sand	1240
Red Bed	1405
Anhydrite	1480
Sand	1600
Shale & Red Bed	1915
Shale & Shells	2200
Shale	2315
Lime & Shale	2970
Chalky Lime & Shale	3005
Lime	3065
Lime & Shale	3270
Chalky Lime & Shale	3390
Chalky Lime	3590
Chalky Lime & Shale	3960
Lime & Shale	4080
Shale	4419
Shale & Lime	4875
Lime	5667
Lime & Shale	5720
Lime	6020
Lime & Shale	6048
Lime	6105
Lime & Shale	6181
Lime	6297

RECEIVED
STATE CORPORATION COMMISSION
JUN 12 1959
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
RUSSELL COUNTY) SS.

I hereby certify that the above information is true and correct to the best of my knowledge.

BENNETT & ROBERTS DRILLING CO.

By John R. Gwin

Subscribed and sworn to before me this 11th day of June, 1959.

Clara L. Sumner
Notary Public

My Commission Expires 6/17/62

PLUGGING
FILE SEC 27 T 34 R 30W
BOOK PAGE 45 LINE 9