

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Meade County. Sec. 31 Twp. 34S Rge. 27W E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
NW NE

Lease Owner Banks Oil Company

Lease Name Reiss Well No. 1

Office Address 200 W. Douglas, Ste 550 Wichita, Ks.

Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

Date Well completed December 1 1981

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced December 1 1981

Plugging completed December 1 1981

Reason for abandonment of well or producing formation
Dry Hole

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

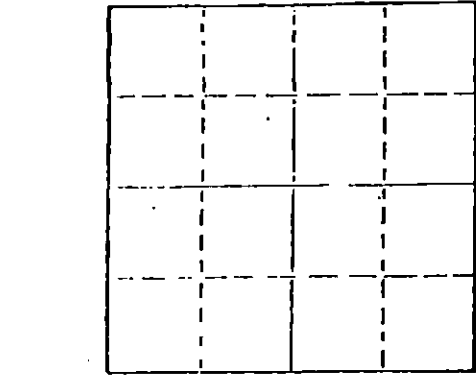

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Paul Luthi, Mineola, Ks.

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 6132'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|-------|--------|--------|------------|
| | Surface | 0 | 1405' | 8-5/8" | 1405' | NONE |
| | Casing | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Plugged well w/70 sax Class H @ 1600',
40 sax Class H @ 1380', 10 sax Class H @ 40', 5 sax in rat hole & 5 sax in
mouse hole. Job completed @ 3:45 a.m.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____

STATE OF Kansas COUNTY OF Sedgwick, ss.


John R. Bartholomew of Sage Drilling (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) John R. Bartholomew
202 South St. Francis, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of December, 1981

Louise K. Whitted
Notary Public.

My commission expires _____



RECEIVED
STATE CORPORATION COMMISSION

DEC 31 1981
12-31-81
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

REISS NO. 1

| | | |
|--|-------------------------------------|---|
| CASING RECORD: | OPERATOR: Banks Oil Company | DESCRIPTION: |
| 8-5/8" set @ 1405' w/775 sax cement | CONTRACTOR: Sage Drilling Co., Inc. | Section 31-34S-27W Meade County, Kansas |
| TOTAL DEPTH: 6132' | COMMENCED: November 18, 1981 | |
| | COMPLETED: December 1, 1981 | |

| <u>FORMATION</u> | <u>FROM</u> | <u>TO</u> | <u>REMARKS</u> |
|------------------|-------------|-----------|-----------------------|
| Sand & Shale | 0 | 1406 | |
| Shale & Sand | 1406 | 1531 | |
| Shale | 1531 | 2075 | |
| Shale & Lime | 2075 | 3085 | |
| Lime & Shale | 3085 | 3308 | |
| Shale & Lime | 3308 | 3720 | |
| Lime & Shale | 3720 | 3850 | |
| Shale & Lime | 3850 | 4130 | |
| Lime & Shale | 4130 | 4330 | |
| Shale & Lime | 4330 | 4690 | |
| Lime & Shale | 4690 | 4900 | |
| Shale & Lime | 4900 | 5160 | |
| Lime & Shale | 5160 | 5320 | |
| Shale & Lime | 5320 | 5540 | |
| Lime & Shale | 5540 | 5645 | |
| Shale & Lime | 5645 | 5729 | |
| Shale | 5729 | 5830 | |
| Lime & Shale | 5830 | 5945 | |
| Shale & Lime | 5945 | 6060 | |
| Lime & Shale | 6060 | 6090 | |
| Shale & Lime | 6090 | 6132 | Logged Hole, D & A |

I certify that this is a true and correct copy of the log on the above captioned well to the best of my knowledge.

SAGE DRILLING CO., INC.

By John R. Bartholomew
John R. Bartholomew

Subscribed and sworn to before me this 28th day of December, 1981.

Louise K. Whitted
Louise K. Whitted, Notary Public

